




ROHS

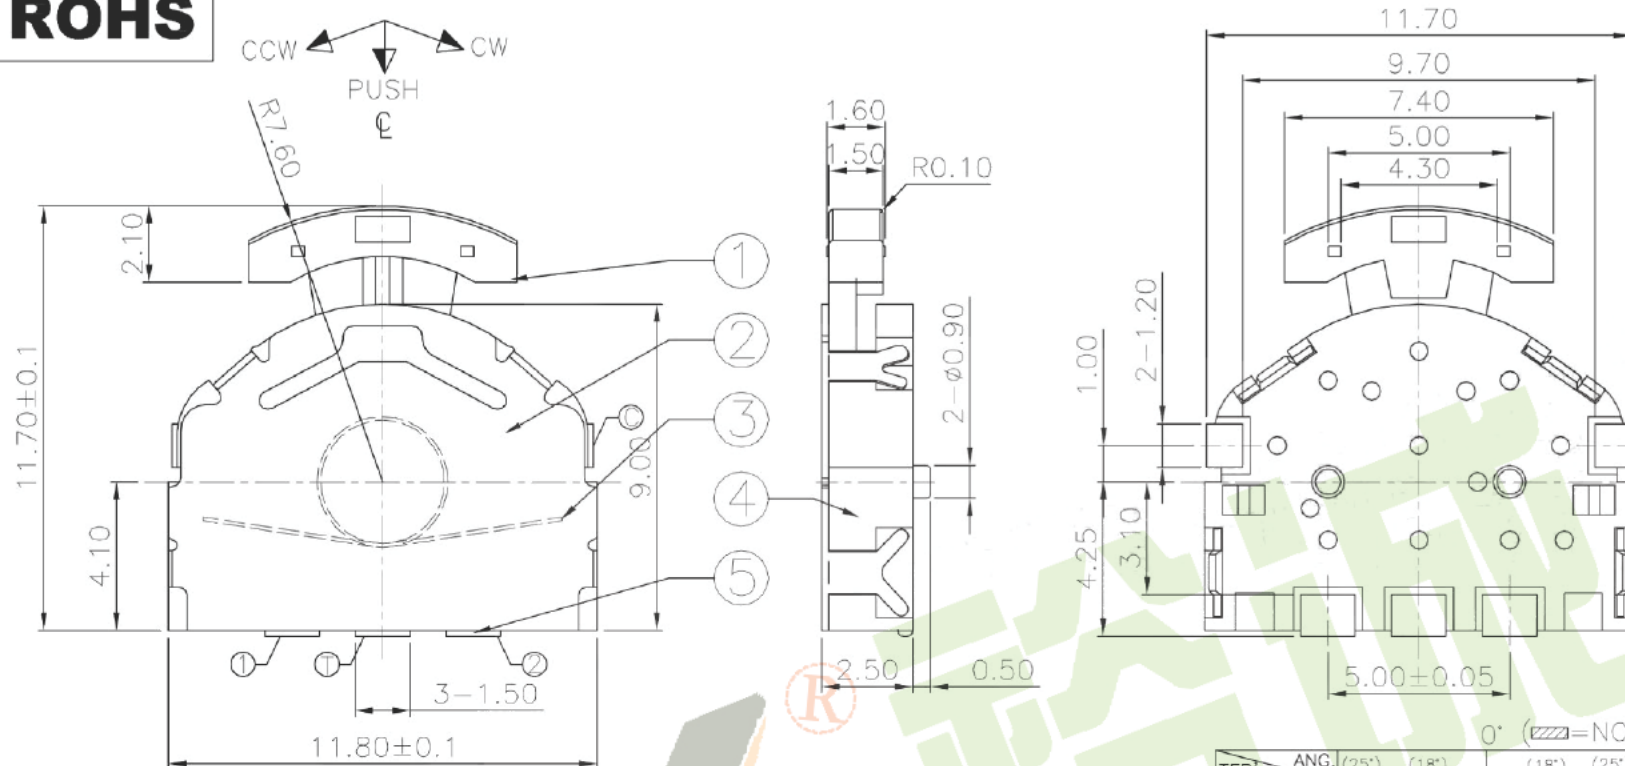

NOTE:
Operating Force:
lever portion 70 ± 40 gf
Push portion 200 ± 40 gf

TER	ANG.	(25°)	(18°)	0° (NO)	(18°)	(25°)
①						
②						
③						

CCW ← → CW
CODE TABLE

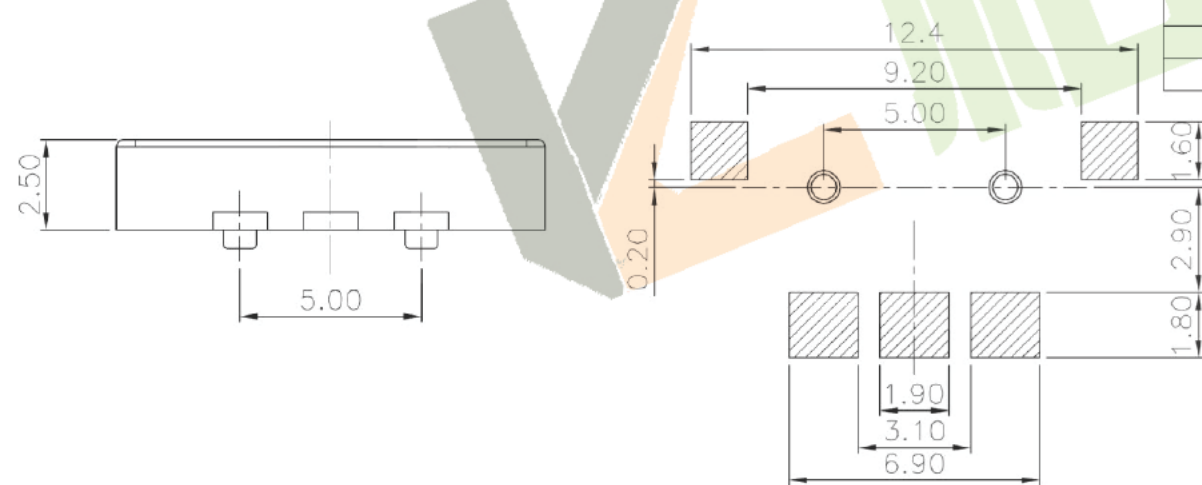

P.C.B Mounting Pattern Dimension

⑥	Contact	—	1	F.Ag/Brass	—	—
⑤	Terminal	—	5	Brass(0.15t)	Plating silver	—
④	Base	—	1	LCP	Black	—
③	Spring	—	1	SUS	—	—
②	Cover	—	1	SUS	—	—
①	Keystoke	—	1	PA46	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		深圳市裕诚电子有限公司 SHENZHEN YUCHENG ELECTRONICS CO.,LTD		
DRAWN	J.X.Zhang	2013/7/22		WEBSITE	www.ycelectron.com	
CHECKED				PART NO.	M1-5128S	
APPROVALS				TOLERANCES ARE	30~以下 ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10	ANGLE ±2°
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

UNIT: mm SCALE: 1:1
SHEET 1 OF 1