

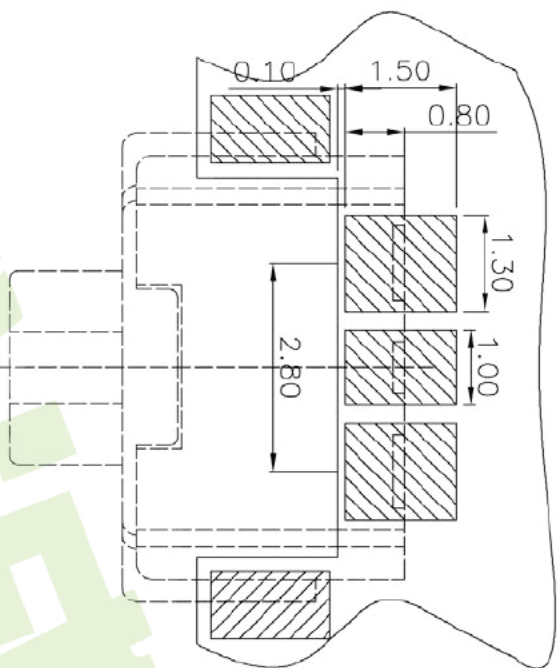


Height of striking position 4.40 ± 0.10

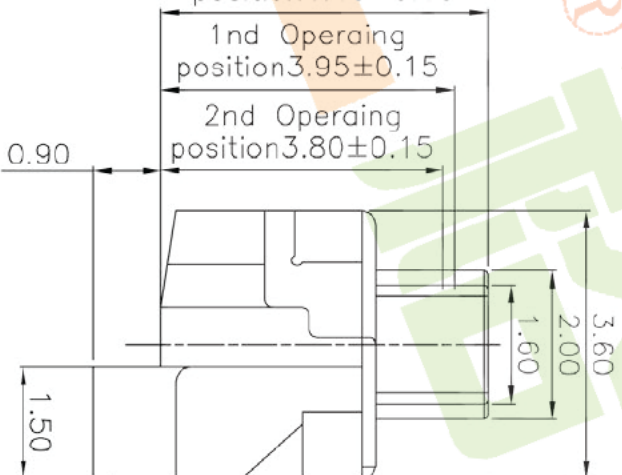

Circuit diagram

Typical Specifications :

1. Rating : DC 12V 50mA
2. Operating force: 1st $60 \pm 30gf$
2st $250 \pm 50gf$
3. Travel: 1st 0.45mm 2st 0.15mm
4. Life: 100,000 Cycles Min.

PCB Layout(Pattern side)

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑦	Silicone shell	—	1	Silicone	—	—
⑥	Dust cover	—	1	KAPTON FILM	—	—
⑤	Terminal	—	3	Phosphor Bronze Plating silver	—	—
④	Contact	—	1	F.Ag/SUS	—	—
③	Base	—	1	LCP	Black	—
②	Cover	—	1	SUS	—	—
①	Keystoke	—	1	Nylon	WHITE	—

DRAWN	LIANKUN.LU	2015.5.19
CHECKED		
APPROVALS		
TOLERANCES ARE	30 ^{±0.15}	±0.30
	10 ^{±0.20}	±0.20
	5 ^{±0.15}	±0.15
	~ 3	±0.10

WEBSITE	www.ycelectron.com
PART NO.	M2-3981A
SCALE:	1:1
DRAWING NO.	
SHEET	1 OF 1

深圳市裕诚电子有限公司
SHENZHEN YUCEG ELECTRONICS CO., LTD