






ROHS

Typical Specifications

1. Rating : 5A120V AC
2. Insulation Resistance:1,000M min
3. Dielectric Strength:1,500V RMS
4. Operating Life : 50,000 cycles

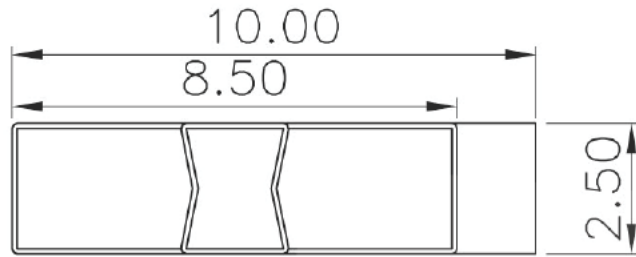

Schematic(Shorting)

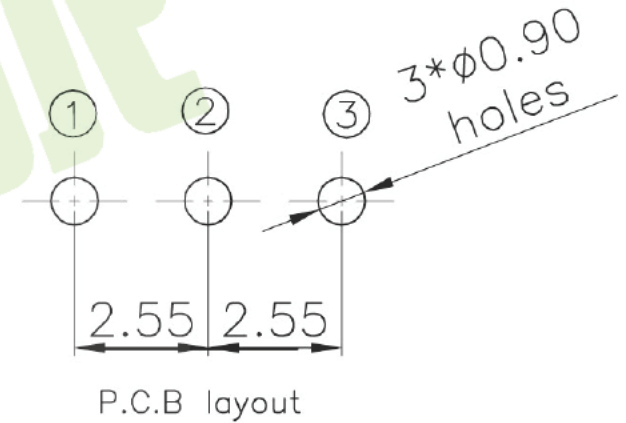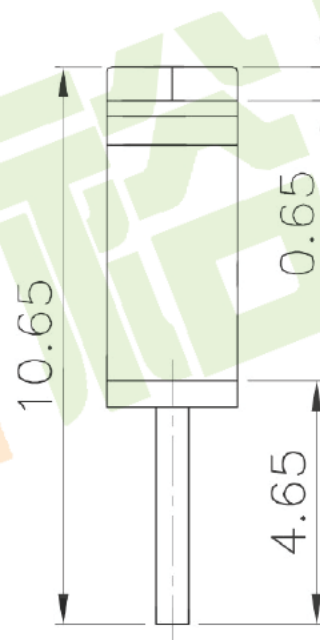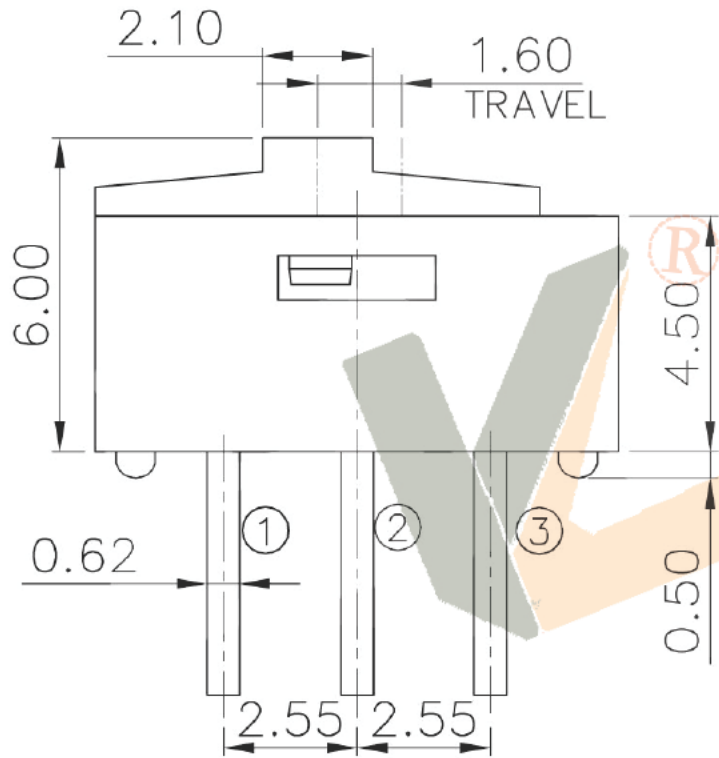

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Spring	—	1	Stainless Steel	Natural	—
④	Contact Clip	—	1	C5210	Ag Clad	—
③	Knob	—	1	PA	RED	—
②	Base	—	1	PA	Gray	—
①	Terminal	—	3	Brass	Au Plated	—

APPROVALS		DATE	深圳市裕诚电子有限公司 SHENZHEN YUCHENG ELECTRONICS CO., LTD																										
DRAWN	JIANKUN.LU	2015.5.25	WEBSITE	www.ycelectron.com																									
CHECKED			PART NO.	M3-2251S																									
APPROVALS			TOLERANCES ARE	<table border="1"> <tr> <td>30~BLE</td> <td>±0.30</td> <td>ANGLE</td> <td>UNIT: mm</td> <td>SCALE: 1:1</td> <td>PROJ: </td> </tr> <tr> <td>10~30</td> <td>±0.20</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5~10</td> <td>±0.15</td> <td>±2'</td> <td>DRAWING NO.</td> <td></td> <td></td> </tr> <tr> <td>~ 5</td> <td>±0.10</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	30~BLE	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:	10~30	±0.20					5~10	±0.15	±2'	DRAWING NO.			~ 5	±0.10					SHEET 1 OF 1
30~BLE	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:																								
10~30	±0.20																												
5~10	±0.15	±2'	DRAWING NO.																										
~ 5	±0.10																												

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			