
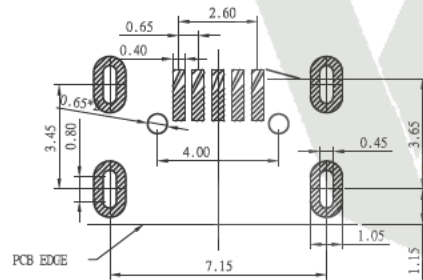
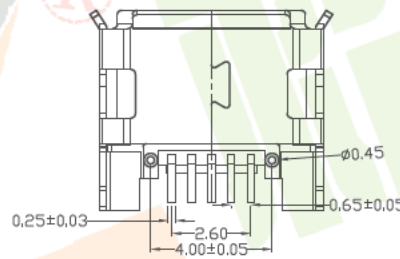
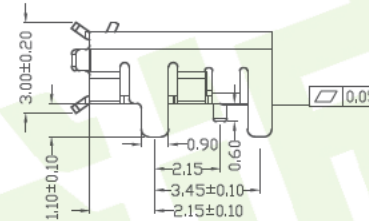




RoHS
Compliant



RECOMMENDED PCB LAYOUT
(TOL:±0.05)

规格说明:Specifications:

电气特性:Electrical:

- 1.额定电流: Current Rating
1.0A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触阻抗: Contact Resistance
50 milliohms MAX
- 4.耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
- 5.绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

物理性能:Mechanical:

- 1.插拔力: Connector Mate and Unmate Force
Mate force:3.0kgf(MAX)
Unmate force:0.7kgf(MIN)
- 2.端子保持力: Terminal Retention
0.5kgf(MIN)

原材料:Material:

- 1.塑胶:Housing:
Hing Temperature Thermoplastics,
UL 94V-0 LCP Black
- 2.端子:Contact:Copper Alloy C5191
- 3.外壳:Shell: Copper Alloy C2680

电镀:Finish:

- 1.端子:Contact: Plated Gold in Mating Area;
Tin On Solder Tails
- 2.外壳:Shell:
Nickel Plating



深圳市裕诚电子有限公司
SHENZHEN YUCHENG ELECTRONICS CO., LTD

图号 (DWG NO)	YC-1899M223	单位(UNIT): MM
版本 (REV)	A/0	比例(SCALE) 1:1
日期 (DATE)	2016.2.5	
设计 (DESIGN)	陈雅	未注公差 TOLERANCE UNSPECIFIED
审核 (CHECKED)	洪章波	X.X ±0.15 X.XX ±0.10 X.XXX ±0.05
核准 (APPROVED)	魏杰	X° ±5° X.X° ±2°

3			
2			
1			
ECN NO.	DESCRPTION	REVISER	DATE

品名 (ITEM NO)	MICRO USB 5P/F DIP B型有柱(四脚插板相同1.1,端子长1.0MM)
料号 (PART NO)	MICRO-C46T
WEBSITE	www.ycelectron.com