

**备注:**

**1. 材质:**

- 1.1 胶芯: LCP+30%G.F UL94V-0
- 1.2 端子: COPPER ALLOY;
- 1.3 外壳: SUS304, T=0.30mm; 表面镀镍100μ"
- 1.4 护板: 不锈钢, T=0.15mm;

**2. 主要特性:**

- 2.1 额定电流: 5A MIN FOR VBUS, 0.25A MIN FOR OTHER.
- 2.2 接触阻抗: 40mΩ MAX
- 2.3 绝缘阻抗: 100MΩ MIN 250V DC
- 2.4 耐压测试: 250V AC
- 2.5 沾锡性: 温度250±5℃, 时间5±0.5s
- 2.6 整体插入力: 2.00kgf MAX  
整体拔出力: 0.80kgf MIN
- 2.7 使用寿命: 10000次
- 2.8 工作温度: -55℃~+85℃

产品料号:

USCX-16FX-XXMX-01


- 1-G.P
- 2-RoHS
- 3-REACH
- 4-HF/无卤

- 1-端子包胶
- 2-PCB板

- B-半金镀层 1u"
- D-半金镀层 5u"
- F-半金镀层 15u"
- H-半金镀层 30u"

- N-可焊锡
- S-镀锡
- T-亮锡
- A-镀金
- K-黑色
- N-本色

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

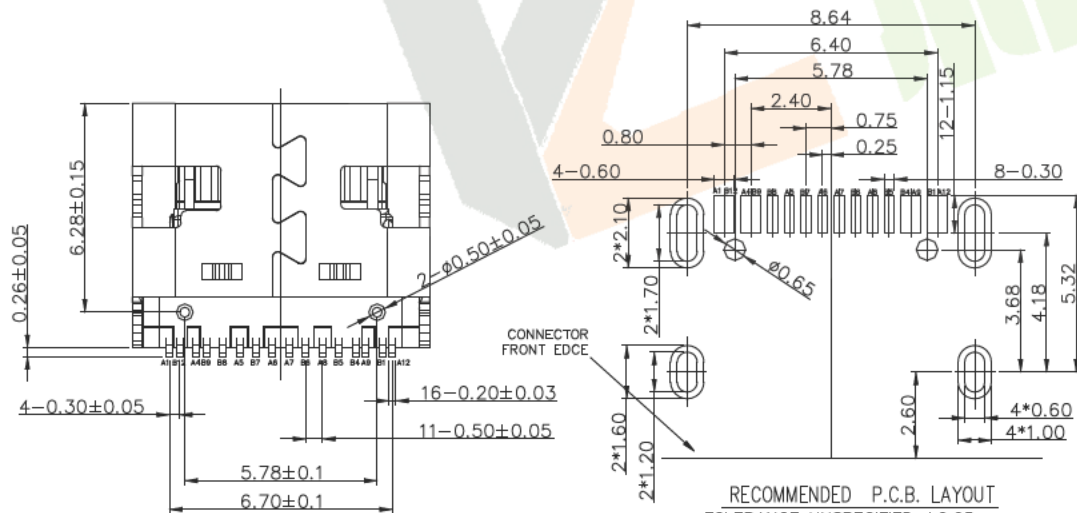

深圳市裕诚电子有限公司

SHENZHEN YUCHENG ELECTRONICS CO., LTD

.X: ±0.25	X: ±1°	APP.	陈雅	DWG NO.	TYPE-C-916P
.XX: ±0.15	.X: ±0.5°	CHK.	洪章波	TITLE	USB 3.1 C 16PF SMT 板上母座 单排短体2.0版
.XXX: ±0.05	.XX: ±0.02°	DGN.	魏杰	www.ycelectron.com	
UNIT mm	SCALE 1:1	DRW.	2016.2.5		
REV. A0	SHEET: 1/1				