

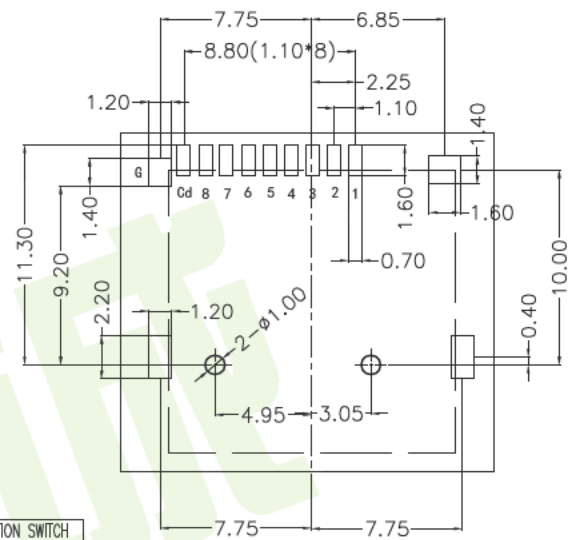
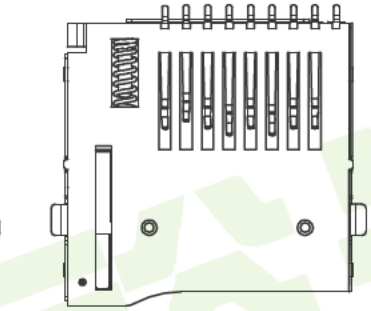


圖面修訂記錄之內容		REV.	DESCRIPTION	DATE	APPD.
<input type="checkbox"/> 工程變更	<input type="checkbox"/> 設計變更	A	New		X.Tai
<input type="checkbox"/> 加工失誤	<input type="checkbox"/> 圖面修正				
<input type="checkbox"/> 新增機種	<input type="checkbox"/> 模具改善				
<input type="checkbox"/> 設計失誤	<input type="checkbox"/> 設計臨時用圖				
<input type="checkbox"/> 修模臨時用圖	<input type="checkbox"/> 設計臨時用圖				

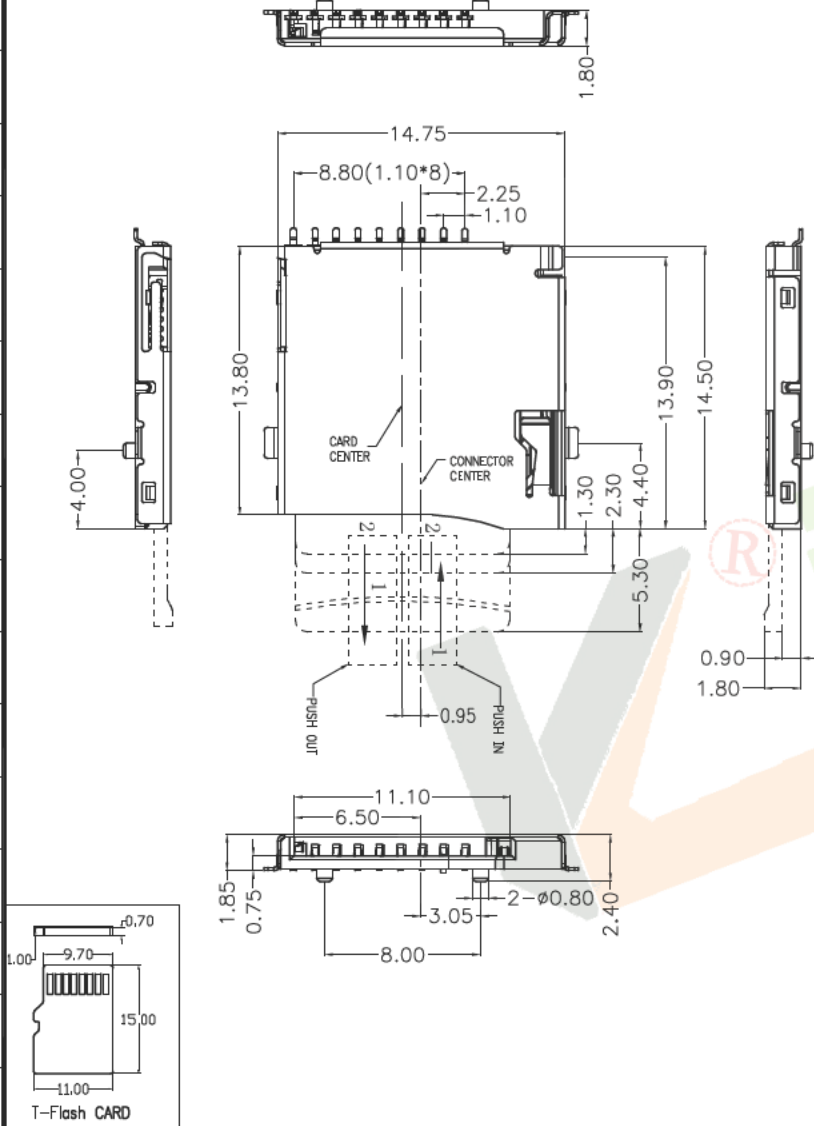


PIN NUMBER	PIN ASSIGNMENT
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1
Cd	CARD DETECTION
G	GROUND

- MATERIAL:
 - HOUSING:HIGH TEMPERATURE THERMOPLASTIC,UL94V-0.
 - SLIDE:HIGH TEMPERATURE THERMOPLASTIC, UL94-0.
 - SHELL:STAINLESS STEEL.
 - CONTACT: COPPER ALLOY.
 - COLL SPRING:STAINLESS STEEL.
 - CRANK AXLE:STAINLESS STEEL.
- PLATED:
 - CONTACT:5u Min Au PLATING IN CONTACT ATEA;
 - 120u Min.Sn IN SOLDER TAILS,
 - 50u Ni UNDERPLATED OVERALL.
 - DETECT PIN:1u Min.Au PLATED OVERALL.
 - 5u Min.Ni UNDERPLATED OVERALL.
- ELECTRICAL PERFORMANCE:
 - CONTACT RESISTANCE:40 MILLIOHMS Max.
 - DIELECTRIC STRENGTH:500V AC FOR 1 MINUTE.
- MECHANICAL PERFORMANCE:
 - CONTACT MATING FORCE:3Kgf Max.
 - CONTACT UNMATING FORCE:100gf Min.
 - CYCLE LIFE:1000 TIMES.

深圳市裕诚电子有限公司
 SHENZHEN YUCHENG ELECTRONICS CO., LTD

GENERAL TOLERANCE	
X ± 0.1	X.* ± 1°
X.X ± 0.05	X.X* ± 0.2°
X.XX ± 0.02	X.XX* ± 0.1°
X.XXX ± 0.01	X.XXX* ± 0.05°



單位	mm	繪圖	陳雅	產品名稱	TF卡座	SHEET
圖幅	A4	審核	洪章波	客戶料號	TF-21A	001
繪圖比例	10:1	核准	魏杰	內部料號	TFCO-02MX-BG40-10-X	REV.
出圖日期	2016.2.5			WEBSITE	www.ycelectron.com	A