

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0  
 CONTACT: COPPER ALLOY.  
 GOLD PLATED Min ON CONTACT AREA, 100u"  
 Min TIN (LEAD FREE) ON SOLDER AREA,  
 SHELL: SUS304-H,T=0.30±0.03mm  
 50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:

INSERTION: 5~20N.  
 EXTRACTION: 8~20N AFTER TEST.  
 DURABILITY: 10000 CYCLES

3.ELECTRICAL:

CURRENT: 5A FOR VBUS;  
 1.25A FOR GND PIN.  
 0.25A FOR OTHER.

VOLTAGE: 20 V MAX  
 WITHSTANDING VOLTAGE: 100V AC R.M.S.  
 CONTACT RESISTANCE: 40mΩ MAX.  
 INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C

5. 尺寸标注事项:

图示有标透者为首样全检, 重点管控尺寸.

6. 产品符合RoHS标准

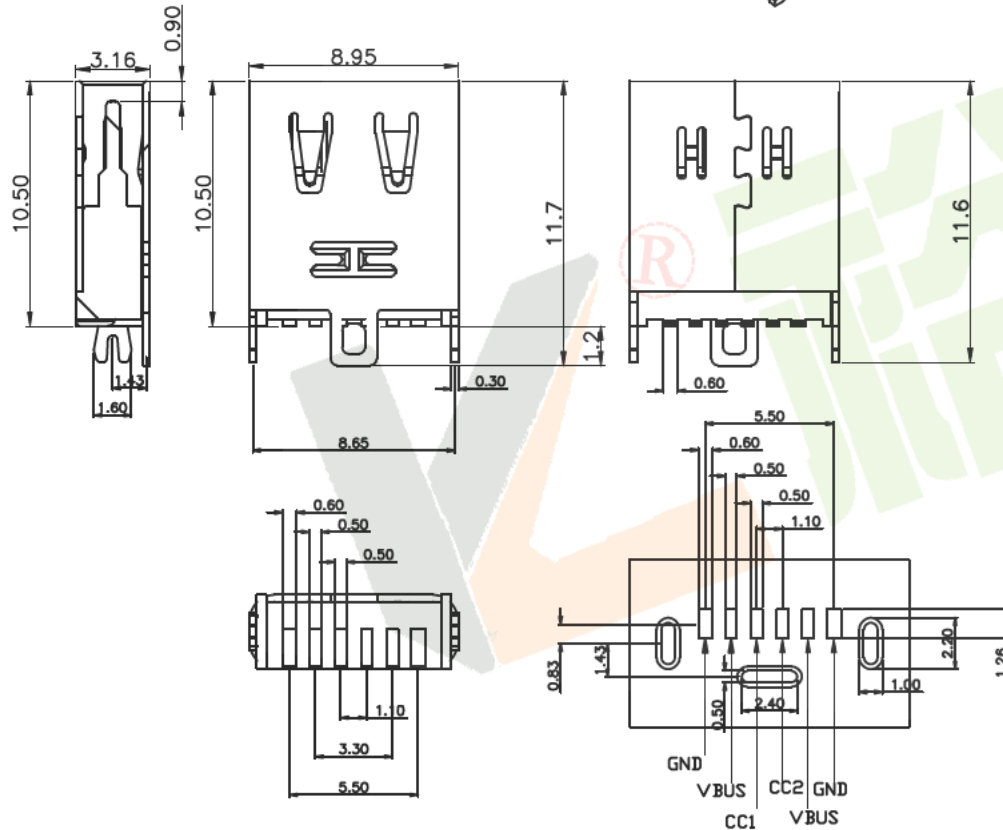


Table:

成品料号	零件名称	零件料号	材料 / 电镀
TX	端子	TX	SUS 304 R-H NO PLATING
	焊接半成品	TX	SUS 301 R-H Sn 80~200u"
	外壳	TX	SUS 301 R-H 电镀材料带层.



深圳市裕诚电子有限公司  
 SHENZHEN YUCHENG ELECTRONICS CO., LTD

.X: ±0.35	.X': ±1.5'	TYPE--C-LT6P	TITLE: USB TYPE C 6PIN PLUG 黄晶耀立斯		
.XX: ±0.25	.XX': ±1.0'		PART NO.:	SEE TABLE	
.XXX: ±0.20	.XXX': ±0.5'	APPD.:	陈雅	DWG. NO.:	T16-000X
MAT'L: SEE NOTES		CHKD.:	洪章波	SCALE: 1:1	PAGE: 1/1
FINISH:	2016.2.5	DR.:	魏杰	UNIT: mm	REV.: AO