


RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
----------	-----------------	------------	------

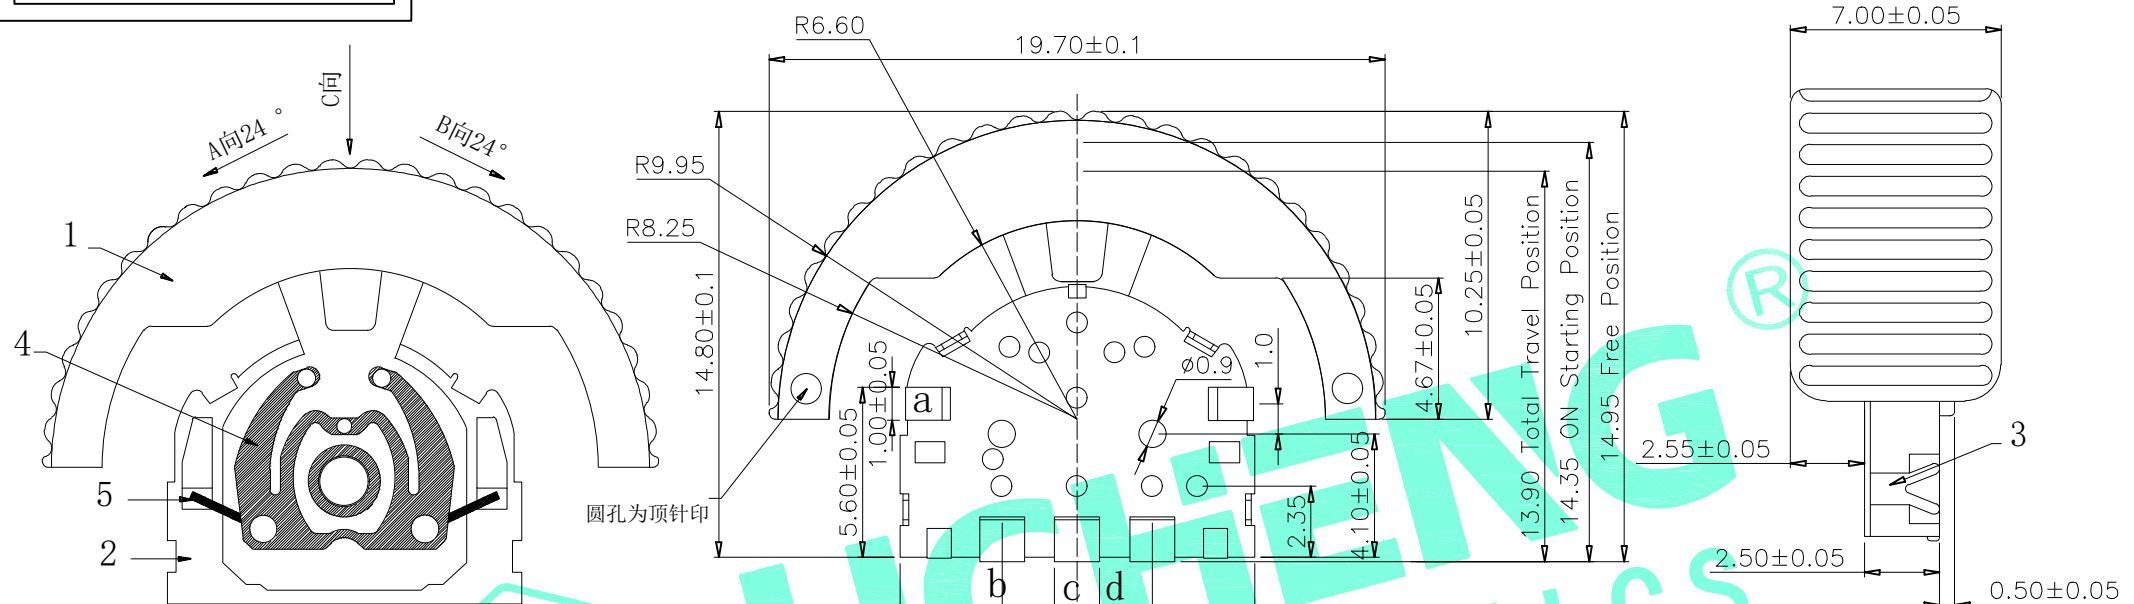

- NOTE:
1. Rating : DC 5V 10mA
 2. Contact Resistance: 100mΩMAX
 3. Insulation Resistance: 100MΩMIN
 4. Soldering Temper: 260±5°/5s
 5. Mechanical Life: 100,000 cycles
 6. Ever Portion 80 ± 50 gf
 7. Push Portion 205 ± 80 gf
 8. Travel: -24° 0° +24°

C向150g
a与c通

a b c d

A向24° a与b

a b c d

B向24° a与d

a b c d

ITEM	PART NAME	QTY.	MATERIAL	FINISHING
⑤	Spring	1	SUS	Natural
④	Terminal	5	Phosphor Bronze	Plating silver
③	Cover	1	SUS	Natural
②	Base	1	LCP	Black
①	Keystoke	1	PPA	Black

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD.

APPROVED: WEI JIE

CHECKED: HONG JIN YUN

DRAWING: CHEN YA

YUCHENG ELECTRONICS 深圳市裕诚电子有限公司
SHENZHEN YUCHENG ELECTRONICS CO.,LTD

GENERAL TOLERANCES	TITLE:	MULTIFUNCTION SWITCH
30~以上 ±0.30	PART NO.:	M1-5138H
10~30 ±0.20	WEBSITE:	www.ycelectron.com
5~10 ±0.15	REV: A	UNIT: mm SCALE: / SHEET: A4
~ 5 ±0.10	SHEET: 1 / 1	