

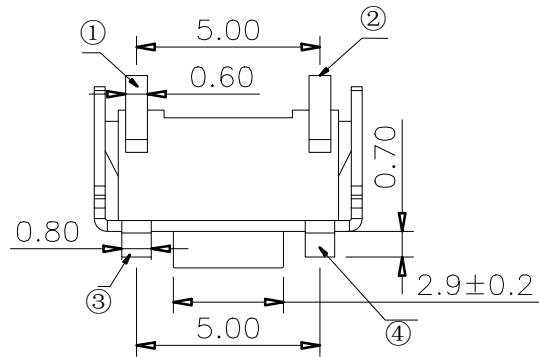
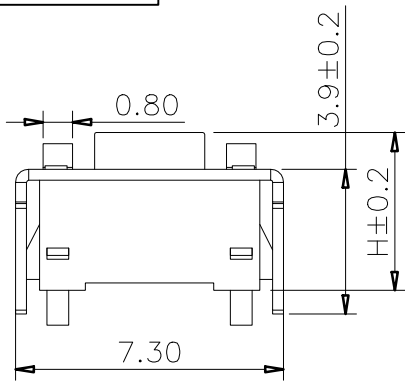



RoHS Compliant


REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
-------------	--------------------	---------------	------

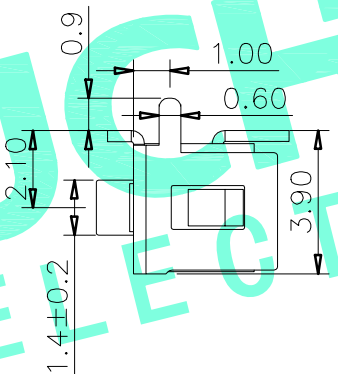

Typical Specifications  
 1.Rating : DC 12V 50mA  
 2.Contact Resistance: ≤100mΩ  
 3.Insulation Resistance: ≥100mΩ  
 4.Operating Force: 160±30gf  
 5.Travel: 0.20±0.1mm  
 6.Life : 50,000 Cycles



NO.1	
PART NO	H
A	4.3
B	4.5
C	5.0
E	6.0
G	7.0
I	8.0

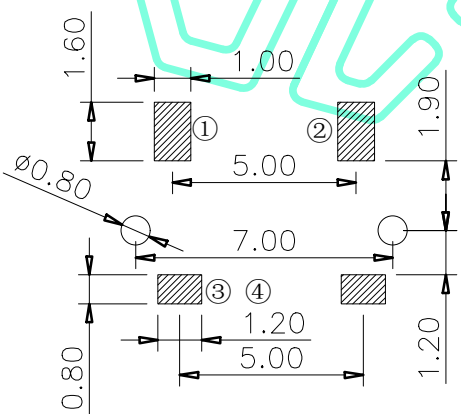

PCB Layout(Pattern side)

ITEM	PART NAME	QTY.	MATERIAL	FINISHING
⑤	Cover	1	SUS	—
④	Keystoke	1	PPA	Black
③	Contact	1	F.Ag/SUS	Plating silver
②	Base	1	PPA	Black
①	Terminal	2	Brass(0.3t)	Plating silver

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS.,LTD.AND SHALL NOT BE REPRODUCED,COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS.,LTD

APPROVED: WEI JIE  
 CHECKED: HONG JIN YUN  
 DRAWING: CHEN YA

**YUCHENG ELECTRONICS** 深圳市裕诚电子有限公司  
 SHENZHEN YUCHENG ELECTRONICS CO.,LTD

GENERAL TOLERANCES		TITLE:	
30~以上	±0.30	TACT SWITCH	
10~30	±0.20	PART NO:	M2-1702P-NO.1
5~10	±0.15	WEBSITE :	www.ycelectron.com
~ 5	±0.10	REV: A	UNIT: mm
SHEET: 1 / 1		SCALE: /	SHEET: A4