

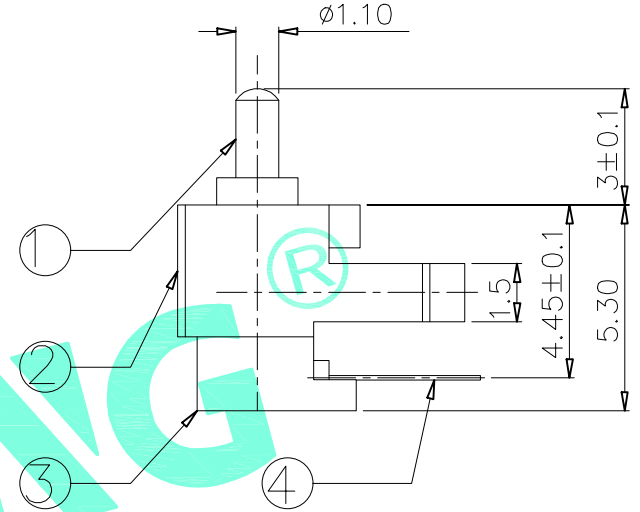
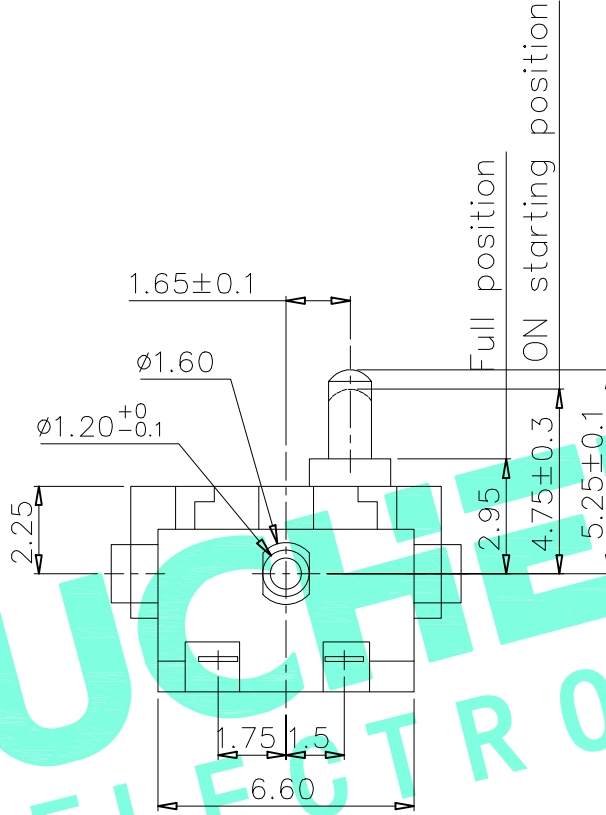
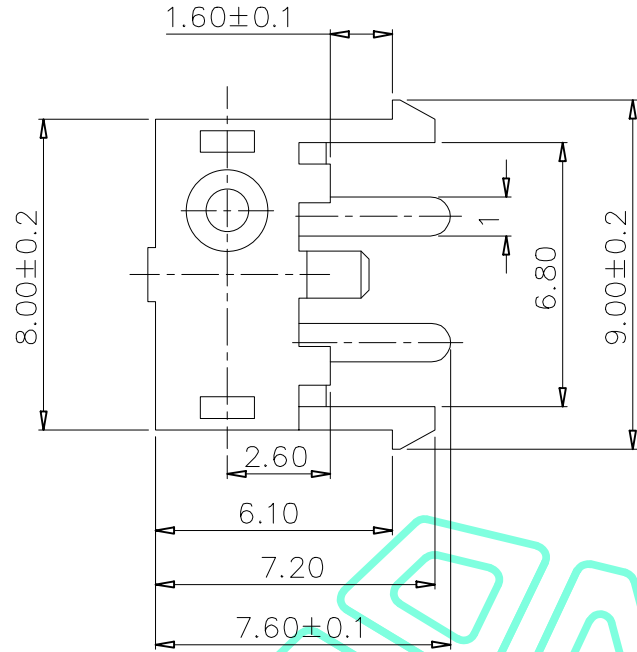


RoHS Compliant

| | | | |
|-------------|--------------------|---------------|------|
| REV. A/0 | DESCRIPTION NEW | DESIGN CWF | DATE |
|-------------|--------------------|---------------|------|



NOTE:
Rating: DC 30V 0.1A
Operating Force: 50±10gf
Lifetime: 50,000 Cycles

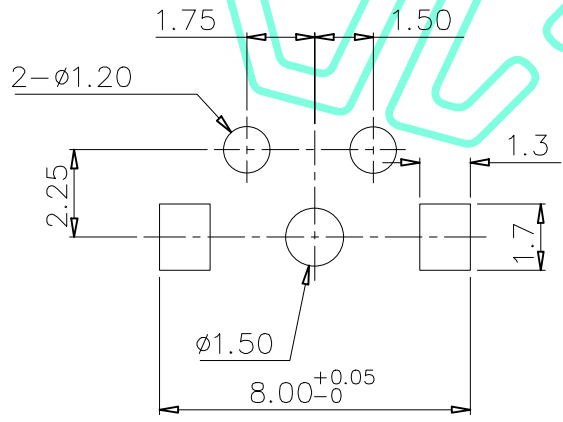

CIRCUIT DIRGRAM

HOLE LAYOUT

| ⑤ | Spring | 1 | Beryllium copper | Ag Plated |
|------|-----------|------|------------------|-----------|
| ④ | Terminal | 2 | Phosphor Bronze | Ag Plated |
| ③ | Base | 1 | NYLON | Black |
| ② | Cover | 1 | NYLON | Black |
| ① | Slider | 1 | NYLON | Black |
| ITEM | PART NAME | QTY. | MATERIAL | FINISHING |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS,LTD

APPROVED: WEI JIE
CHECKED: HONG JIN YUN
DRAWING: CHEN YA

UCHENG 深圳市裕诚电子有限公司
ELECTRONICS SHENZHEN YUCHENG ELECTRONICS CO.,LTD

| | | | | |
|--------------------|-------|--------------|--------------------|----------|
| GENERAL TOLERANCES | | TITLE: | DETECTION SWITCH | |
| 30~以上 | ±0.30 | PART NO: | M5-1665D | |
| 10~30 | ±0.20 | WEBSITE: | www.ycelectron.com | |
| 5~10 | ±0.15 | REV: A | UNIT: mm | SCALE: / |
| ~ 5 | ±0.10 | SHEET: 1 / 1 | SHEET: A4 | ④ |