

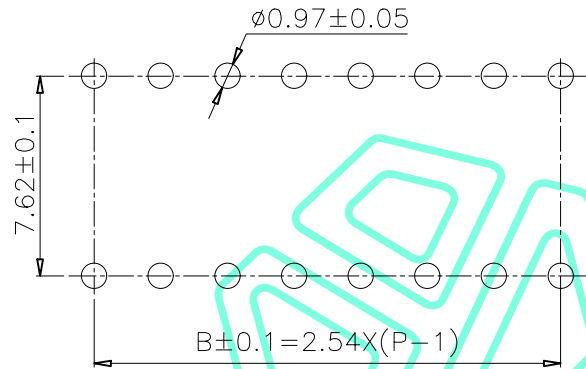
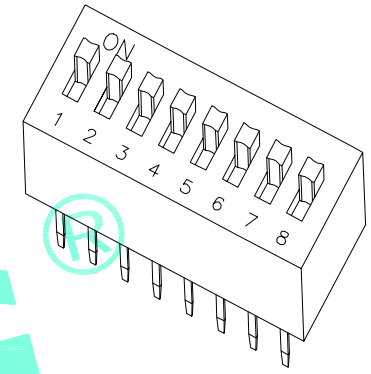
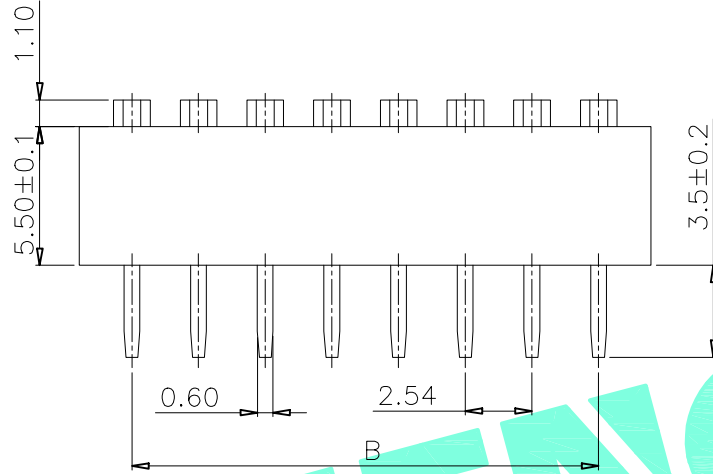


RoHS Compliant


REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
----------	-----------------	------------	------

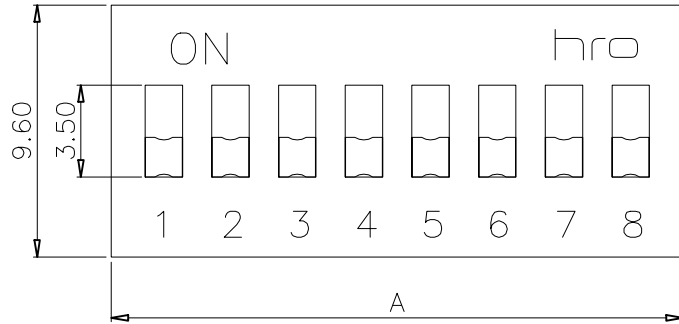

PCB Layout(Pattern Side)



Circuit Diagram

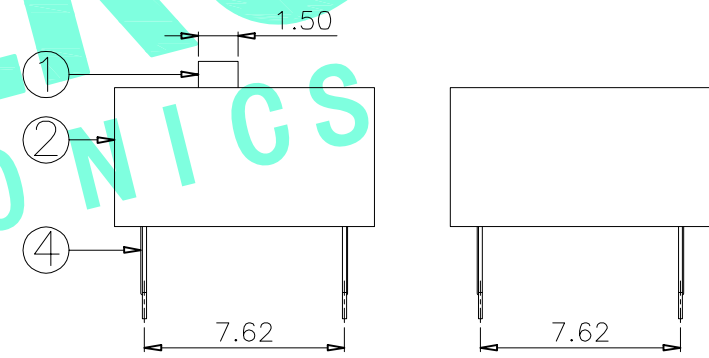

高推(G)

平推(P)

Position(位数)	1P	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P	
DIM.A(长度)	3.54	6.64	9.18	11.72	14.26	16.80	19.34	21.88	24.42	26.96	32.04	
DIM.B(长度)	—	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	27.94	
PART NO.	高推(G)	M6-GF01GH	M6-GF02GH	M6-GF03GH	M6-GF04GH	M6-GF05GH	M6-GF06GH	M6-GF07GH	M6-GF08GH	M6-GF09GH	M6-GF10GH	M6-GF12GH
盖子/红色(H)	平推(P)	M6-GF01PH	M6-GF02PH	M6-GF03PH	M6-GF04PH	M6-GF05PH	M6-GF06PH	M6-GF07PH	M6-GF08PH	M6-GF09PH	M6-GF10PH	M6-GF12PH
PART NO.	高推(G)	M6-GF01GL	M6-GF02GL	M6-GF03GL	M6-GF04GL	M6-GF05GL	M6-GF06GL	M6-GF07GL	M6-GF08GL	M6-GF09GL	M6-GF10GL	M6-GF12GL
盖子/蓝色(L)	平推(P)	M6-GF01PL	M6-GF02PL	M6-GF03PL	M6-GF04PL	M6-GF05PL	M6-GF06PL	M6-GF07PL	M6-GF08PL	M6-GF09PL	M6-GF10PL	M6-GF12PL

⑤	Gum Water		Epikote	Black
④	Terminal		Phosphor bronze	Au Plating
③	Base	1	PBT	Black
②	Cover	1	PBT	Red/Blue
①	Keystoke		PBT	White
ITEM	PART NAME	QTY.	MATERIAL	FINISHING

NOTE:

- 1.Rating: 24V 25mA DC
- 2.Insulation Resistance: $\geq 100 \text{ M}\Omega$
- 3.Withstand voltage: AC 500V 1Minute
- 4.Operating Force Range: 1000gf Max
- 5.Electrical Life: 2,000 Cycles
- 6.Operating Temperature range $-20^{\circ}\sim +70^{\circ}\text{C}$
- 7.Ambient Humidity used: $\leq 85\% \text{RH}$

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS.,LTD.AND SHALL NOT BE REPRODUCED,COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS.,LTD



深圳市裕诚电子有限公司
SHENZHEN YUCHENG ELECTRONICS CO.,LTD

APPROVED:	WEI JIE
CHECKED:	HONG JIN YUN
DRAWING:	CHEN YA

GENERAL TOLERANCES		TITLE: DIAL SWITCH SPACING2.54			
30~以上	±0.30	PART NO: M6-GF□□□□			
10~30	±0.20				
5~10	±0.15	WEBSITE: www.ycelectron.com			
~ 5	±0.10				
SHEET: 1 / 1	REV: A	UNIT: mm	SCALE: /	SHEET: A4	