


RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
-------------	--------------------	---------------	------

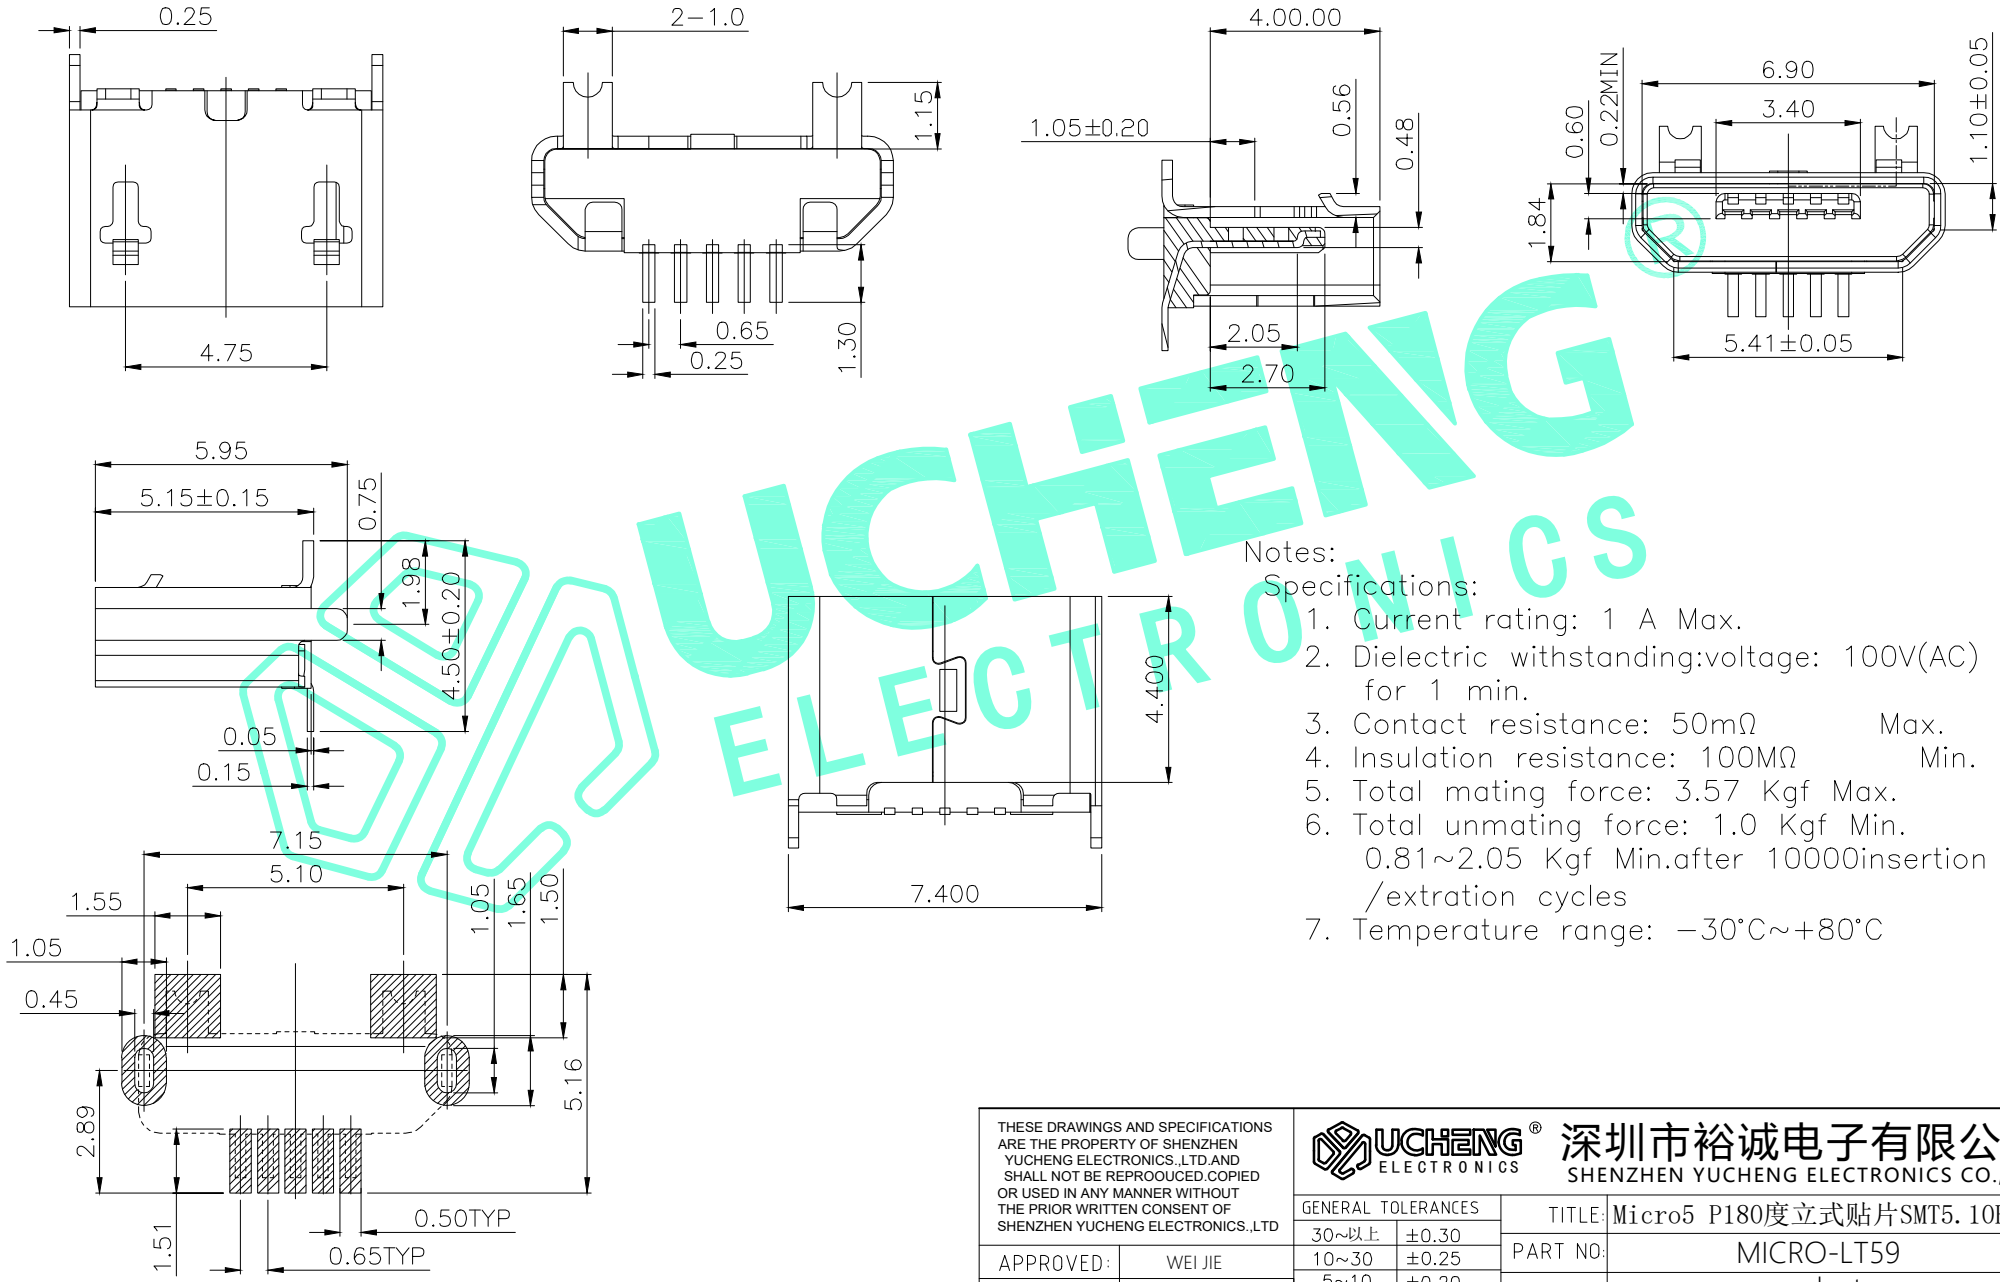

- Notes:  
Specifications:
1. Current rating: 1 A Max.
  2. Dielectric withstanding:voltage: 100V(AC) for 1 min.
  3. Contact resistance: 50mΩ Max.
  4. Insulation resistance: 100MΩ Min.
  5. Total mating force: 3.57 Kgf Max.
  6. Total unmating force: 1.0 Kgf Min.  
0.81~2.05 Kgf Min.after 10000insertion /extration cycles
  7. Temperature range: -30°C~+80°C

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS .LTD.AND SHALL NOT BE REPRODUCED.COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS..LTD		 <b>深圳市裕诚电子有限公司</b> SHENZHEN YUCHENG ELECTRONICS CO.,LTD	
APPROVED: WEI JIE		TITLE: Micro5 P180度立式贴片SMT5.10H直边	
CHECKED: HONG JIN YUN		PART NO: MICRO-LT59	
DRAWING: CHEN YA		WEBSITE : www.ycelectron.com	
SHEET: 1 / 1		REV: A UNIT: mm SCALE: / SHEET: A4	

RECOMMENDED PCB LAYOUT