
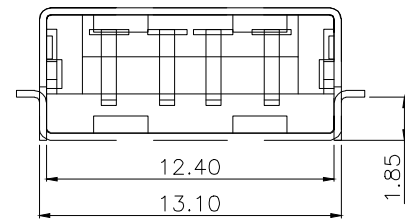
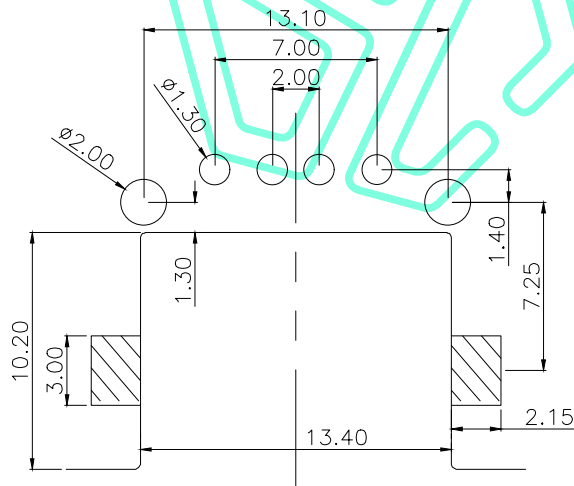
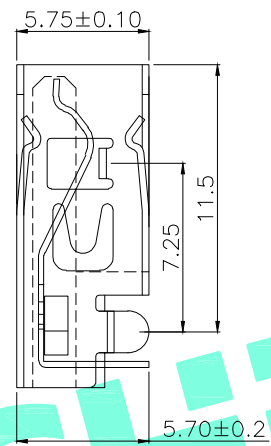


RoHS Compliant

| | | | |
|-------------|--------------------|---------------|------|
| REV. A/0 | DESCRIPTION NEW | DESIGN CWF | DATE |
|-------------|--------------------|---------------|------|

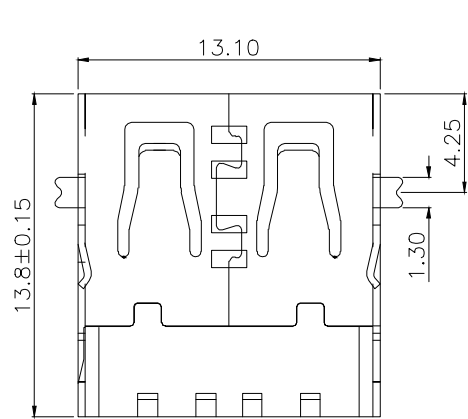

Specifications:

Electrical:

1. Current Rating
1.5A/contact terminal
2. Voltage Rating
30V DC
3. Contact Resistance
30 milliohms MAX
4. Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. Insulation Resistance:
1000MEGA ohms MIN

Mechanical:

1. Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)

Material:

1. Housing: LCP
2. Contact: Copper Alloy C2680
3. Shell: Copper Alloy C2680/SPCC

Finish:

1. Contact: Plated Gold in Mating Area;
Tin On Solder Talls
50U" MIN Tin Plating, 1U" Au Plating
2. Shell:
80U" MIN Nickel Plating

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD.

APPROVED: WEI JIE
CHECKED: HONG JIN YUN
DRAWING: CHEN YA

UCHENG ELECTRONICS 深圳市裕诚电子有限公司
SHENZHEN YUCHENG ELECTRONICS CO.,LTD

| | | | |
|--------------------|-------|-------------------------------|----------|
| GENERAL TOLERANCES | | TITLE: USB 2.0AF 沉板90度直边带支架短脚 | |
| 30~以上 | ±0.30 | PART NO: USB-C138Z | |
| 10~30 | ±0.25 | WEBSITE: www.ycelectron.com | |
| 5~10 | ±0.20 | REV: A | |
| ~ 5 | ±0.15 | UNIT: mm | SCALE: / |
| SHEET: 1 / 1 | | SHEET: A4 | |