

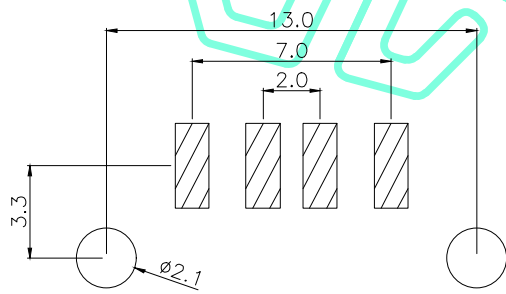
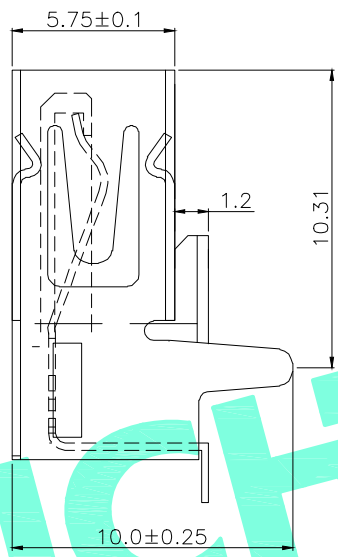


RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CFW	DATE
-------------	--------------------	---------------	------

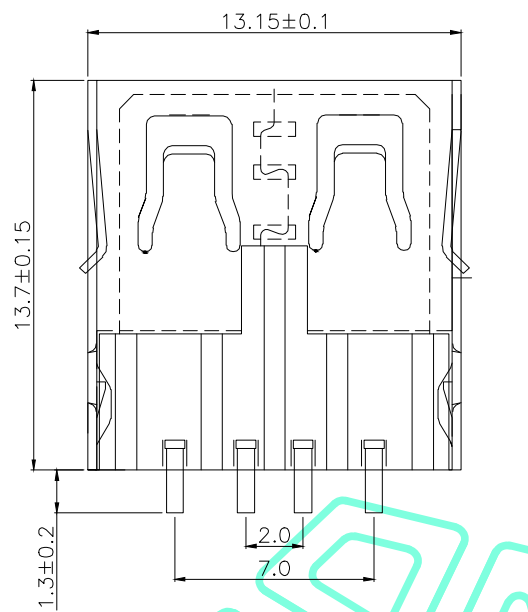

Recommended PCB Layout

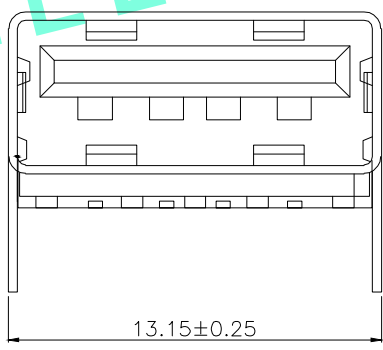

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)

③	Base	1	PBT	White
②	Terminal	4	Copper	Sn Plated
①	Housing	1	SPCC	Ni Plated
ITEM	PART NAME	QTY.	MATERIAL	FINISHING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD.

UCHENG 深圳市裕诚电子有限公司
ELECTRONICS SHENZHEN YUCHENG ELECTRONICS CO.,LTD

APPROVED: WEI JIE		GENERAL TOLERANCES		TITLE: USB 2.0AF 90度13.7直边 直脚	
CHECKED: HONG JIN YUN		30~以上	±0.30	PART NO: USB-ZJ137	
DRAWING: CHEN YA		10~30	±0.25	WEBSITE: www.ycelectron.com	
		5~10	±0.20	REV: A UNIT: mm SCALE: / SHEET: A4	
		~ 5	±0.15	SHEET: A4	
		SHEET: 1 / 1		THI	