
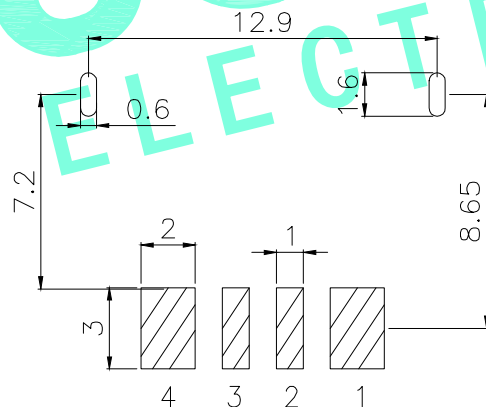
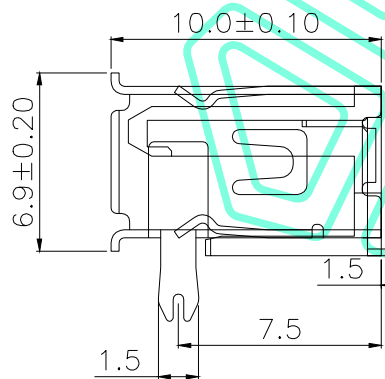
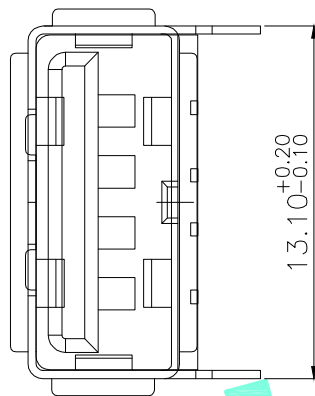


RoHS Compliant

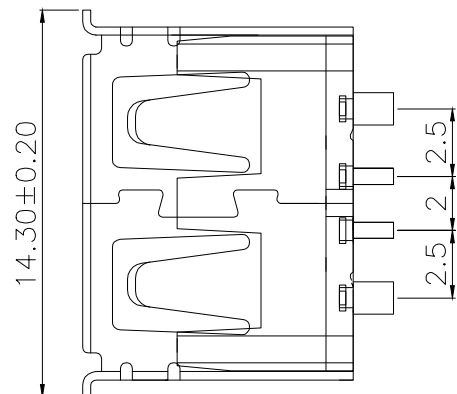

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS,LTD.AND SHALL NOT BE REPRODUCED,COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS,LTD

APPROVED: WEI JIE
 CHECKED: HONG JIN YUN
 DRAWING: CHEN YA

UCHENG® 深圳市裕诚电子有限公司
 ELECTRONICS SHENZHEN YUCHENG ELECTRONICS CO.,LTD

GENERAL TOLERANCES		TITLE:	USB 2.0AF 90度前两脚卷边贴板
30~以上	±0.30	PART NO:	USB-Q2J90
10~30	±0.25	WEBSITE:	www.ycelectron.com
5~10	±0.20	REV: A	UNIT: mm SCALE: / SHEET: A4
~ 5	±0.15		
SHEET: 1 / 1			

Specifications:

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
----------	-----------------	------------	------

Electrical:

- Current Rating
3.1A/contact terminal
- Voltage Rating
30V DC
- Contact Resistance
30 milliohms MAX
- Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- Insulation Resistance:
1000MEGA ohms MIN

Mechanical:

- Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
- Terminal Retention
1.0kgf(MIN)

Material:

- Housing:
Hing Temperature Thermoplastics,
- Contact: Copper Alloy C2680
- Shell: Copper Alloy C2680/SPCC

Finish:

- Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- Plated Tin 50U"(MIN), Plated Gold 1U

Shell:

- Plated Tin 80U"(MIN)
Nickel Plating