

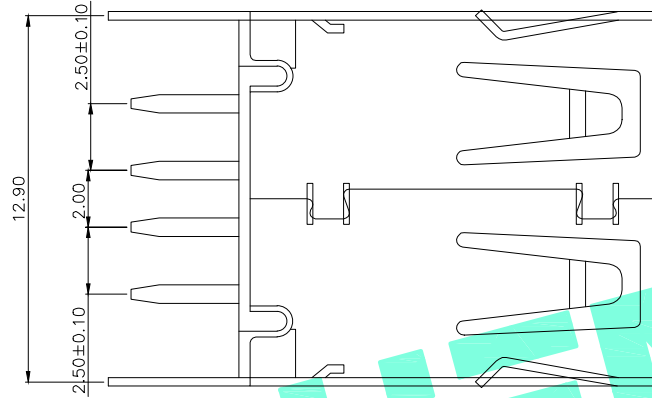


RoHS Compliant


REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
-------------	--------------------	---------------	------

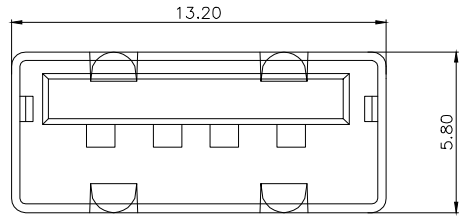

特性: Specifications;
 电器: Electyical:
 接触阻抗: Contact Resistance
 30 millionms MAX
 耐电压: Dielectyic Withstanding Voltage:
 500v AC AT Sea Level
 绝缘阻抗: Insulation Resistance:
 1000 MEGA ohms MLN
 机构: Machanical:
 接合为: Mating Force;
 4.0 KG MAX 最大4Kg
 拔出力: Unmating Force;
 0.7KG MIN.最少0.7 KG
 机械寿命: Mechanical Life:3,000 Cycles.

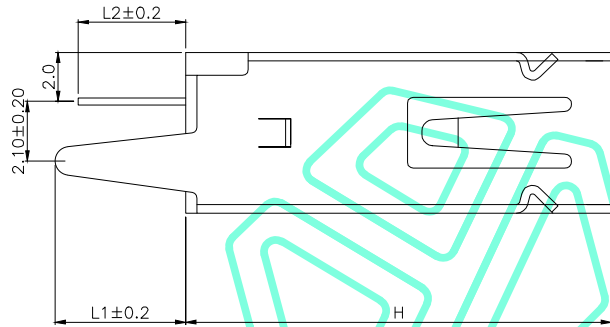

PART NO	H	L1	L2
USB-Z18CZ-13.0	13.0	4.7	3.0
USB-Z18CZ-13.7	13.7		
USB-Z18CZ-15.0	15.0	3.1	2.3

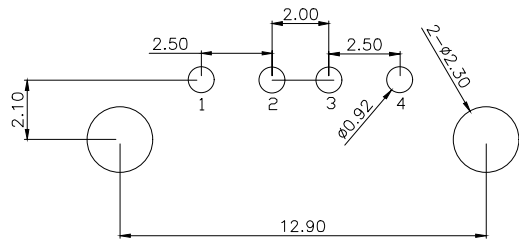

Recommended PCB Layout

③	Base	1	NYLON	White
②	Terminal	4	Phosphor Bronze	Ag Plated
①	Housing	1	SPCC/Phosphor Bronze	Ni Plated
ITEM	PART NAME	QTY.	MATERIAL	FINISHING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS.LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS.LTD



深圳市裕诚电子有限公司
SHENZHEN YUCHENG ELECTRONICS CO.,LTD

APPROVED:	WEI JIE	GENERAL TOLERANCES	TITLE:	USB 2.0AF 180度直边直脚
CHECKED:	HONG JIN YUN	30~以上 ±0.30	PART NO:	USB-Z18CZ
DRAWING:	CHEN YA	10~30 ±0.25	WEBSITE:	www.ycelectron.com
		5~10 ±0.20	REV: A	UNIT: mm
		~ 5 ±0.15		SCALE: /
		SHEET: 1 / 1		SHEET: A4

