


RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
----------	-----------------	------------	------

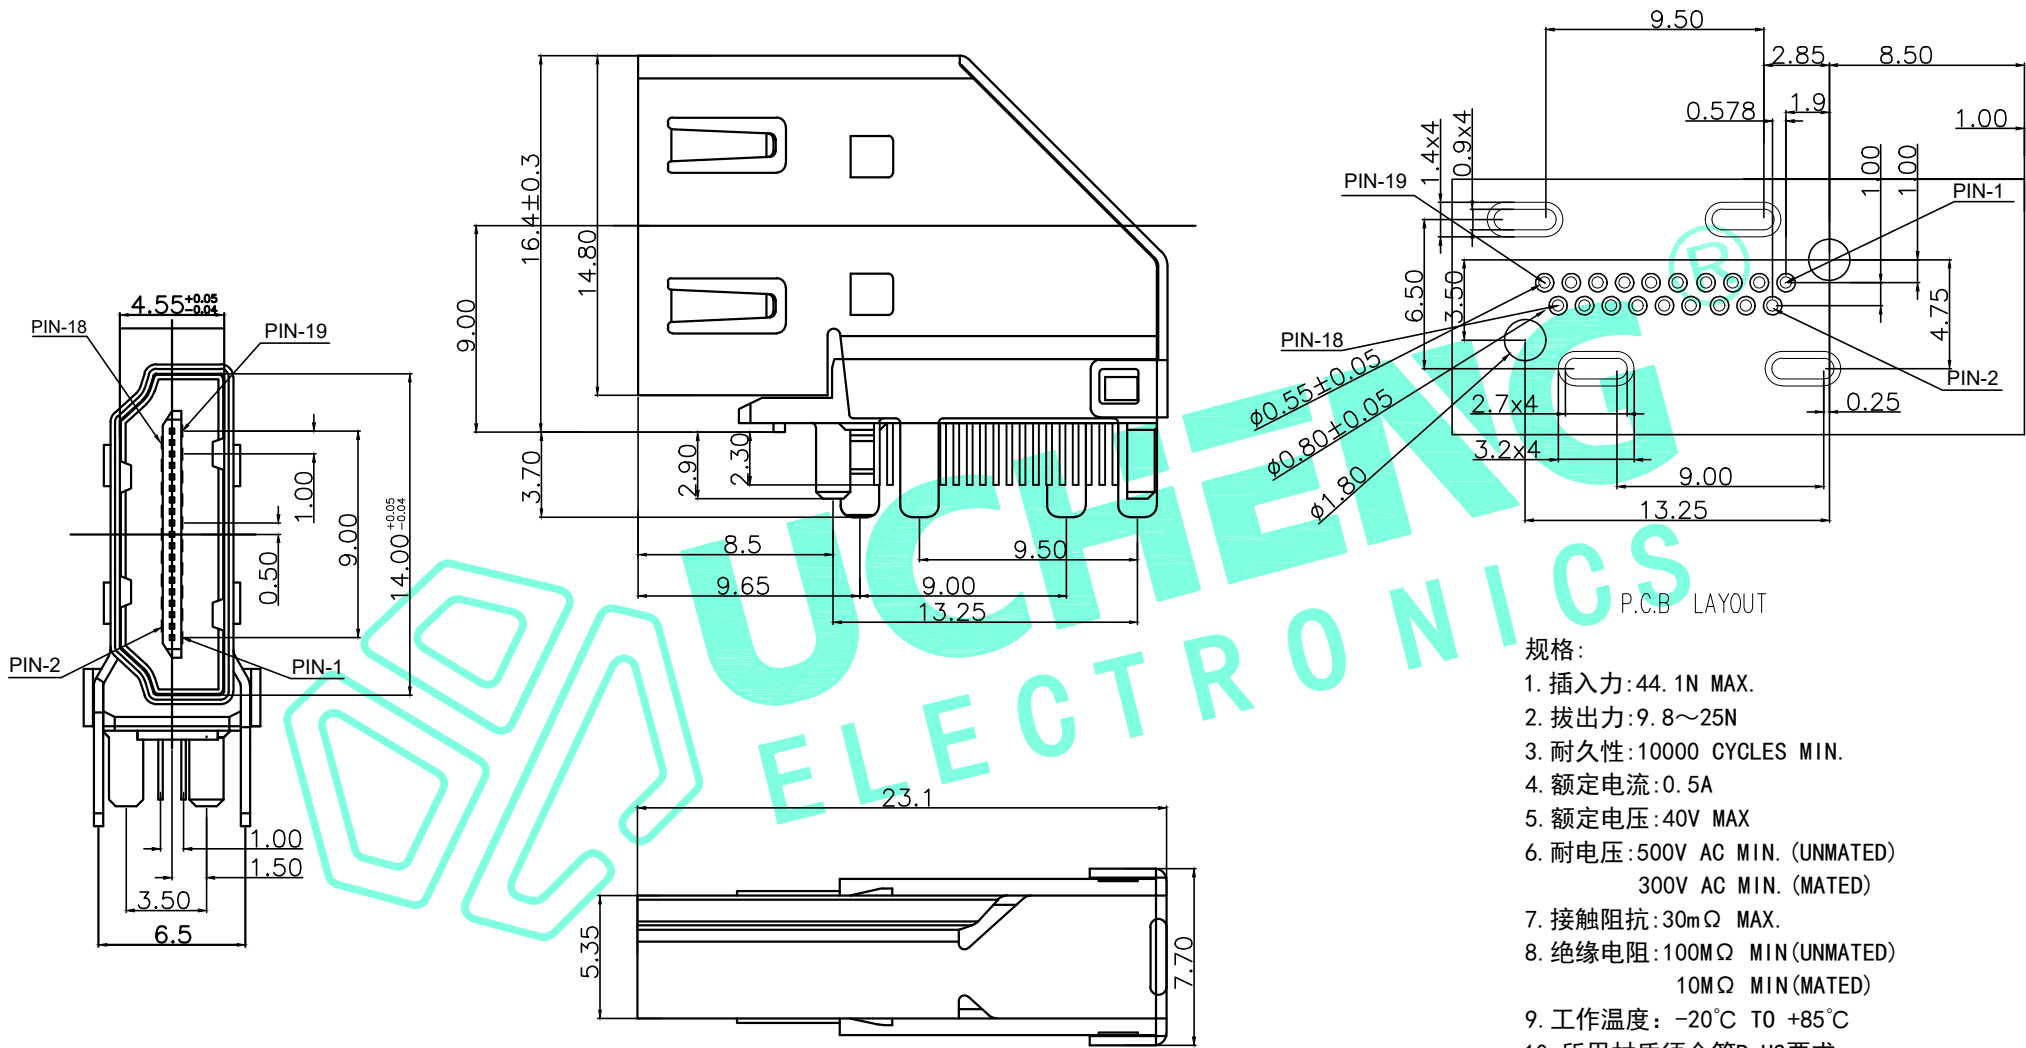

P.C.B LAYOUT

- 规格:
1. 插入力: 44.1N MAX.
 2. 拔出力: 9.8~25N
 3. 耐久性: 10000 CYCLES MIN.
 4. 额定电流: 0.5A
 5. 额定电压: 40V MAX
 6. 耐电压: 500V AC MIN. (UNMATED)
300V AC MIN. (MATED)
 7. 接触阻抗: 30mΩ MAX.
 8. 绝缘电阻: 100MΩ MIN (UNMATED)
10MΩ MIN (MATED)
 9. 工作温度: -20°C TO +85°C
 10. 所用材质须符合RoHS要求

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD.

APPROVED: WEI JIE
 CHECKED: HONG JIN YUN
 DRAWING: CHEN YA

YUCELETRONICS 深圳市裕诚电子有限公司
 SHENZHEN YUCHENG ELECTRONICS CO., LTD

GENERAL TOLERANCES		TITLE:	HDMI 19PIN侧插母座 L=23.1MM 弯脚		
X. ±0.50	X.* ±2'	PART NO:	HDMI-C231		
.X ±0.30	.X' ±1'	WEBSITE:	www.ycelectron.com		
.XX ±0.10	.XX' ±0.5'	REV: A	UNIT: mm	SCALE: /	SHEET: A4
.XXX ±0.05		SHEET: 1 / 1			