
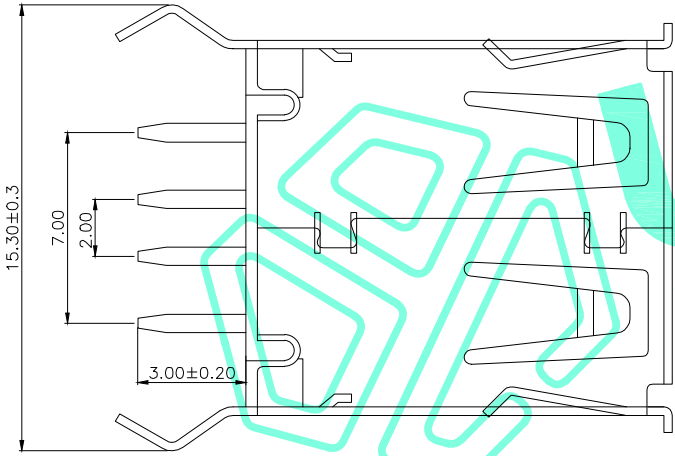
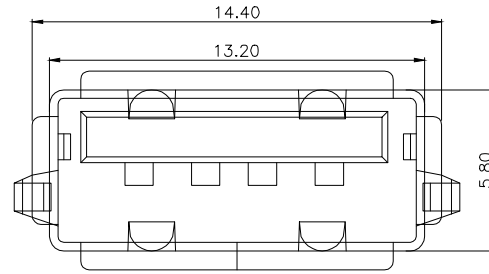


RoHS Compliant

REV.	DESCRIPTION	DESIGN	DATE
A/0	NEW	CFW	

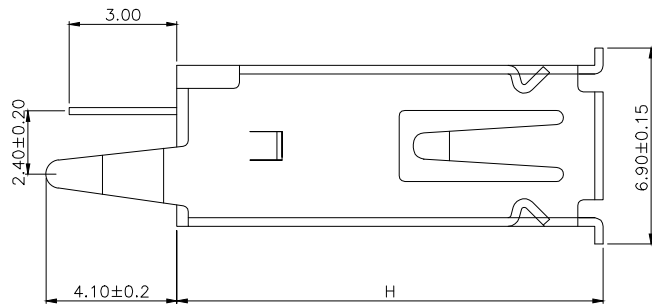

PART NO	H
USB-J18CW-13.00	13.00
USB-J18CW-13.70	13.70
USB-J18CW-15.00	15.00


Specifications

Electyical:

- Current Rating: 1.8A/contact terminal
- Voltage Rating: 30V DC
- Contact Resistance: 30 millionms MAX
- Dielectric Withstanding Voltage: 500V AC AT Sea Level
- Insulation Resistance: 1000 MEGA ohms MLN

Machanical:

- Mating Force: 4.0 KG MAX
- Unmating Force: 0.7KG MIN

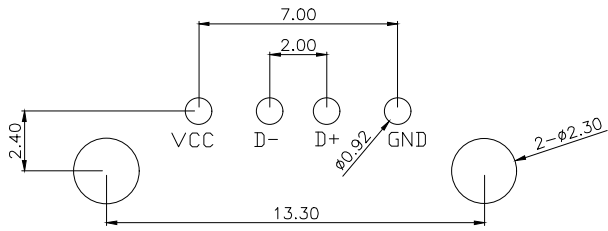

Recommended PCB Layout

③	Base	1	NYLON	White
②	Terminal	4	Phosphor Bronze	Ag Plated
①	Housing	1	SPCC/Phosphor Bronze	Ni Plated
ITEM	PART NAME	QTY.	MATERIAL	FINISHING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS.,LTD



深圳市裕诚电子有限公司  
SHENZHEN YUCHENG ELECTRONICS CO.,LTD

APPROVED:	WEI JIE	GENERAL TOLERANCES	TITLE:	USB 2.0AF 180度卷边弯脚
CHECKED:	HONG JIN YUN	30~以上 ±0.30	PART NO:	USB-J18CW
DRAWING:	CHEN YA	10~30 ±0.25	WEBSITE:	www.ycelectron.com
		5~10 ±0.20	REV: A	UNIT: mm SCALE: / SHEET: A4
		~ 5 ±0.15		
		SHEET: 1 / 1		