


RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
----------	-----------------	------------	------

A
B
C
D
E
F
G

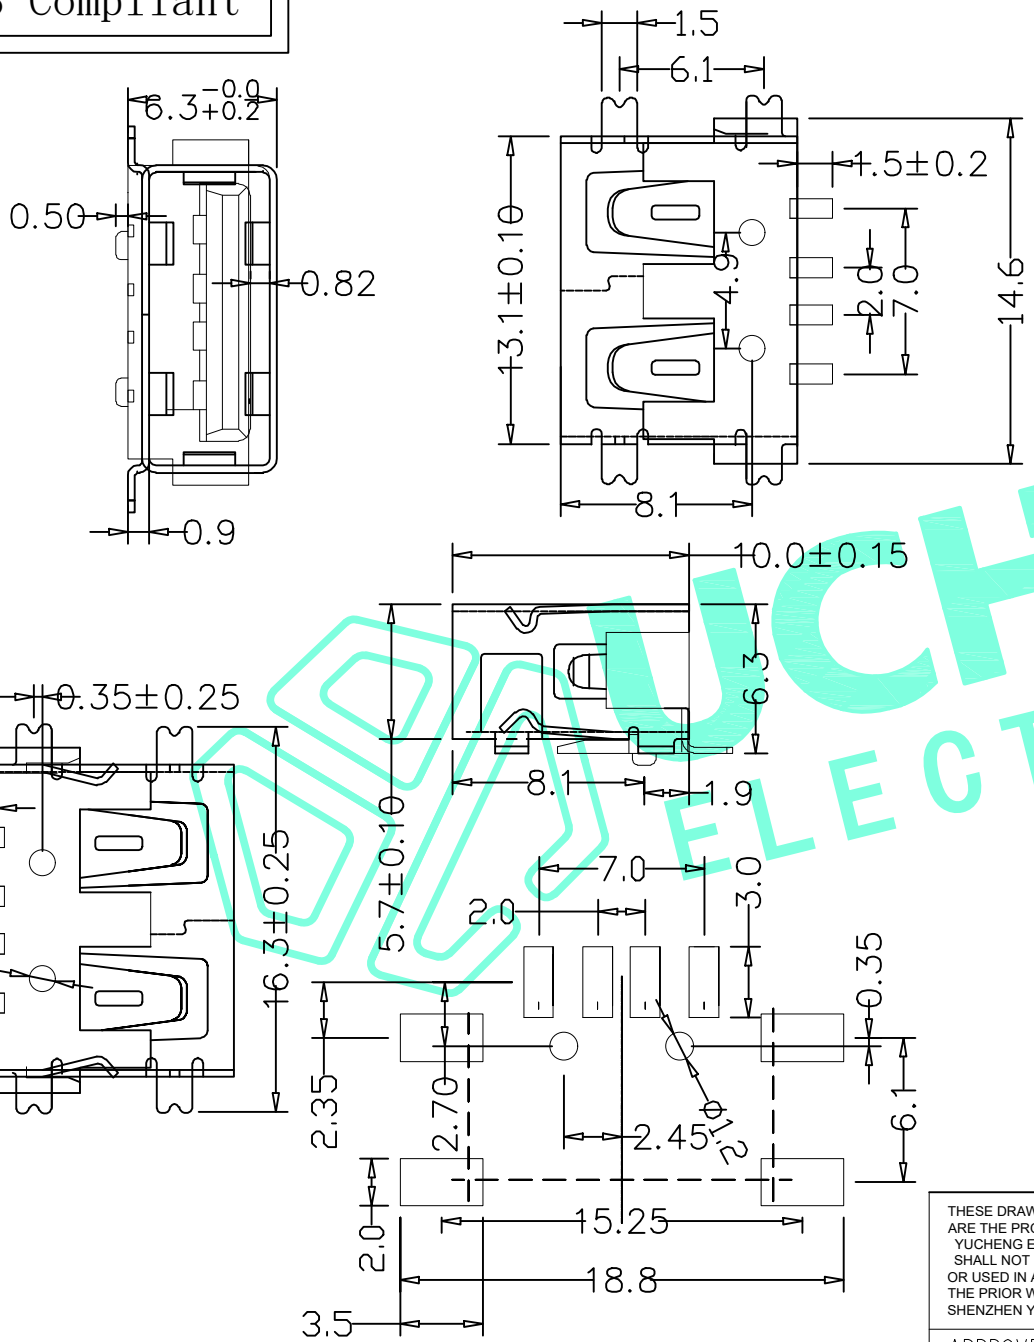

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触电阻: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Tnermaplastics,
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳: Shell:
铜壳四周镀80U”(MIN)锡

端子四周镀50U”(MIN)锡, 镀金区域镀100-200U”镀金1U”

Nickel Plating

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD.

APPROVED:	WEI JIE
CHECKED:	HONG JIN YUN
DRAWING:	CHEN YA

		深圳市裕诚电子有限公司 SHENZHEN YUCHENG ELECTRONICS CO.,LTD	
GENERAL TOLERANCES		TITLE: USB 2.0AF 短体10.0四脚全贴 直边6.3	
30~以上	±0.30	PART NO: USB-4Q10Z	
10~30	±0.25	WEBSITE: www.ycelectron.com	
5~10	±0.20	REV: A UNIT: mm SCALE: / SHEET: A4	
~ 5	±0.15		
SHEET: 1 / 1			

A
B
C
D
E
F
G