

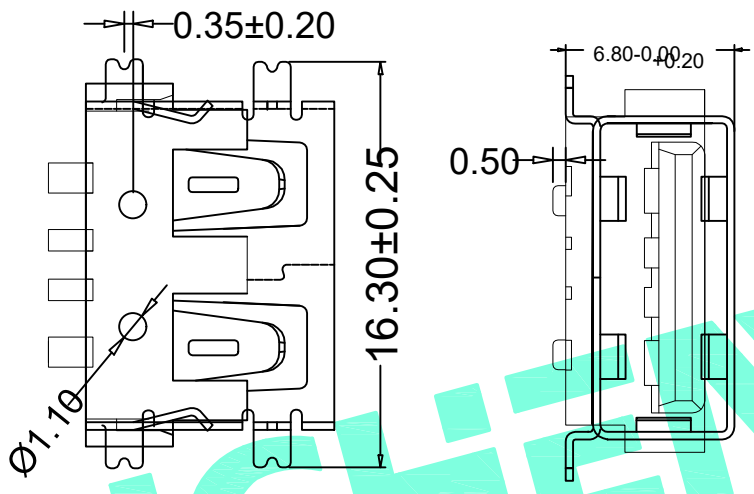
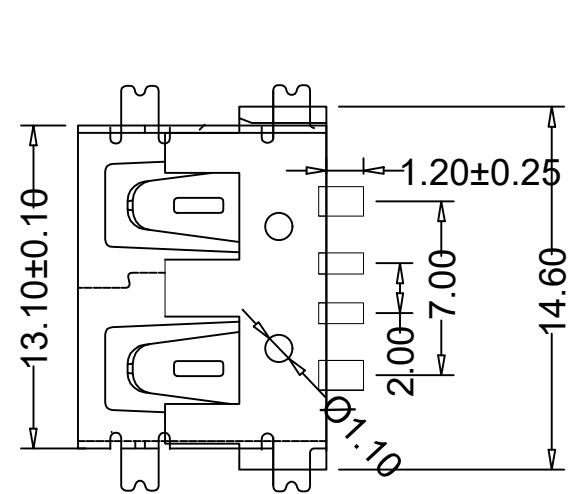


RoHS Compliant

REV.	DESCRIPTION	DESIGN	DATE
A/0	NEW	CWF	

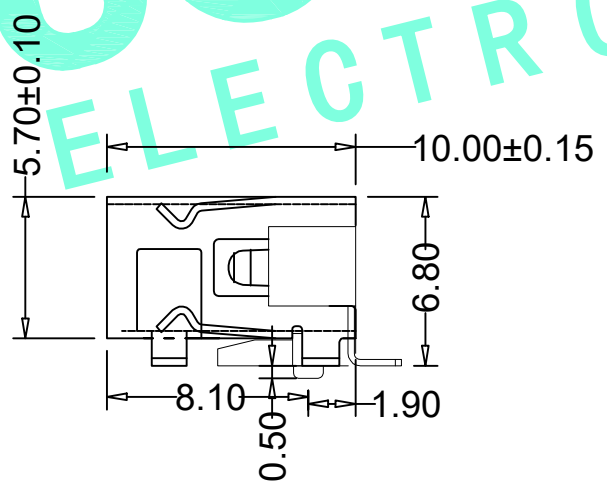

- 规格说明: Specifications:**
- 电气特性: Electrical:**
- 额定电流: Current Rating  
3.0A/contact terminal
  - 额定电压: Voltage Rating  
30V DC
  - 接触电阻: Contact Resistance  
30 milliohms MAX
  - 耐压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
  - 绝缘电阻: Insulation Resistance:  
1000MEGA ohms MIN
- 物理性能: Mechanical:**
- 插拔力: Connector Mate and Unmate Force  
Mate force: 3.57kgf (MAX)  
Unmate force: 1.02kgf (MIN)
  - 端子保持力: Terminal Retention  
1.0kgf (MIN)
- 原材料: Material:**
- 壳体: Housing:  
Hing Temperature Ternmaplastics,
  - 端子: Contact: Copper Alloy C2680
  - 外壳: Shell: Copper Alloy C2680/SPCC
- 电镀: Finish:**
- 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Tails
- 端子四周镀50U"(MIN)锡, 镀金区域镀100-200U"镀金1U"  
2. 外壳: Shell:  
镀光—铜壳四周镀80U"(MIN)镍  
Nickel Plating

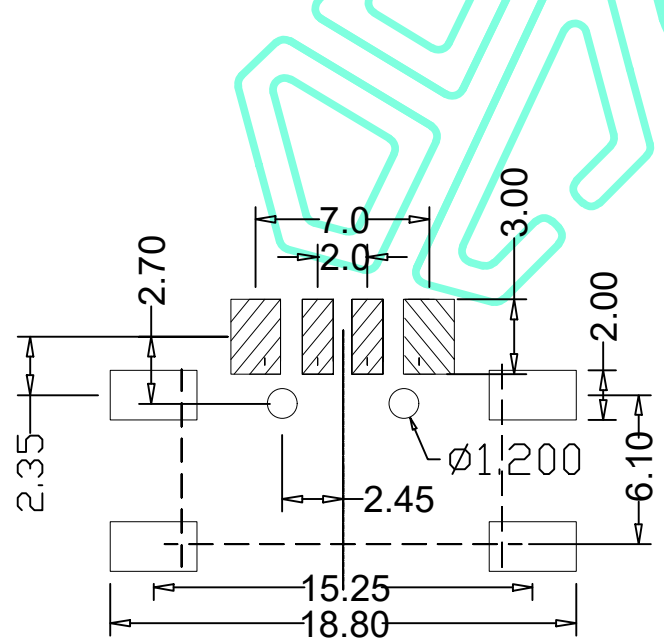

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD.

**UCHENG** ELECTRONICS 深圳市裕诚电子有限公司  
SHENZHEN YUCHENG ELECTRONICS CO., LTD

APPROVED: WEI JIE		GENERAL TOLERANCES		TITLE: USB 2.0AF 短体全贴直边6.8 大电流	
CHECKED: HONG JIN YUN		30~以上	±0.30	PART NO: USB-68QT4	
DRAWING: CHEN YA		10~30	±0.25	WEBSITE: www.ycelectron.com	
		5~10	±0.20	REV: A UNIT: mm SCALE: / SHEET: A4	
		~ 5	±0.15		
		SHEET: 1 / 1			

