
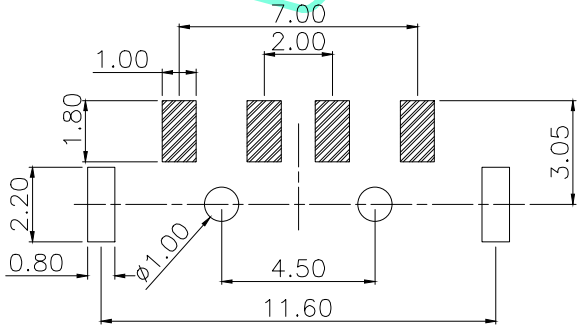
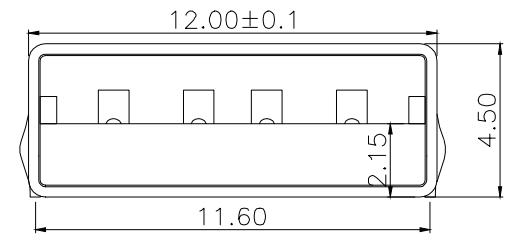
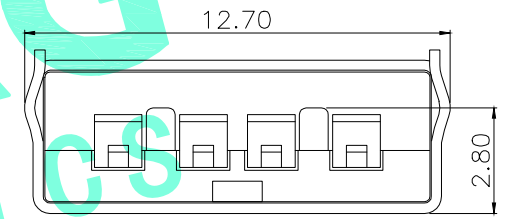


RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
----------	-----------------	------------	------

SPECIFICATIONS

1. Rating : DC 30V 1.0A
2. Contact Resistance:  $\leq 50m\Omega$
3. Insulation Resistance:  $\geq 1000m\Omega$  Min AC250V
4. Operating Temperature Range:  $-40^{\circ}C+85^{\circ}C$
5. Manual welding is required:  $\leq 350^{\circ}C$   
 $\leq 3$  seconds
6. Mechanical Characteristics:  
Mating Force: 3.75kgf Max  
Unmating Force: 1.02kgf Min

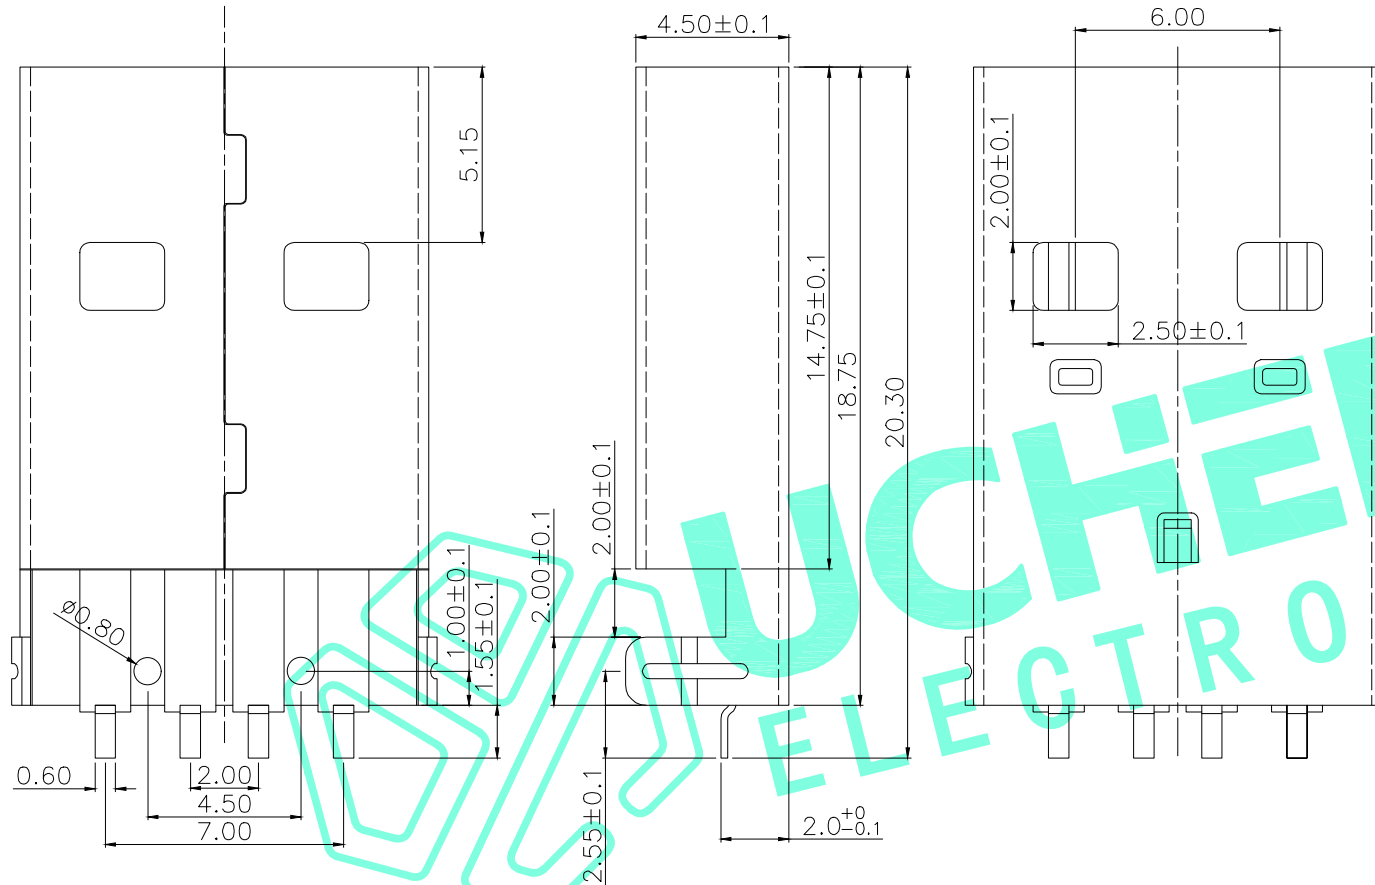

PCB Layout

③	Shell	1	SPCC	Ni Plated
②	Contact	4	Copper Alloy	Ag Plated
①	Housing	1	PBT	White/Black
ITEM	PART NAME	QTY.	MATERIAL	FINISHING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS.,LTD



深圳市裕诚电子有限公司  
SHENZHEN YUCHENG ELECTRONICS CO.,LTD

APPROVED:	WEI JIE	GENERAL TOLERANCES	TITLE:	USB 2.0 A公沉板无孔贴板
CHECKED:	HONG JIN YUN	30~以上 ±0.30	PART NO.:	USB-AC47T
DRAWING:	CHEN YA	10~30 ±0.25	WEBSITE:	www.ycelectron.com
		5~10 ±0.20	REV: A	UNIT: mm SCALE: / SHEET: A4
		~ 5 ±0.15		
		SHEET: 1 / 1		