
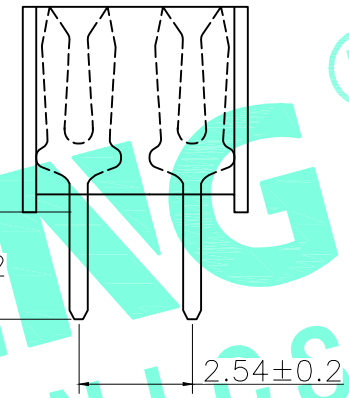
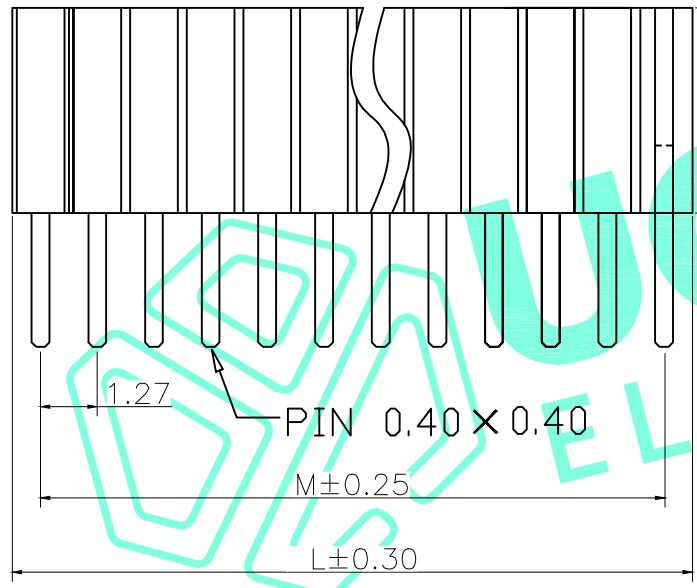


RoHS Compliant


REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
----------	-----------------	------------	------

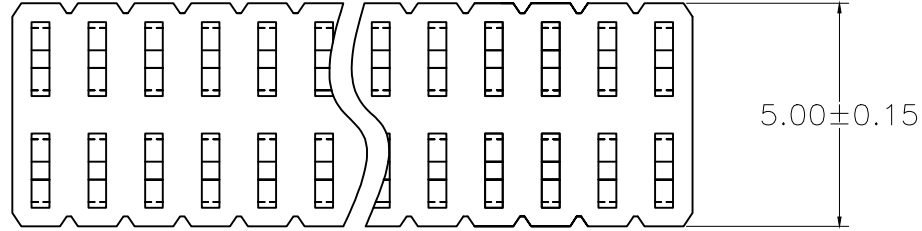

No. of PIN/ROW	Dimension Information	
	M	L
02	1.27	2.54
03	2.54	3.81
04	3.81	5.08
05	5.08	6.35
06	6.35	7.62
07	7.62	8.89
08	8.89	10.16
09	10.16	11.43
10	11.43	12.70
11	12.70	13.97
12	13.97	15.24
13	15.24	16.51
14	16.51	17.78
15	17.78	19.05
16	19.05	20.32
17	20.32	21.59
18	21.59	22.86
19	22.86	24.13
20	24.13	25.40
21	25.40	26.67
22	26.67	27.94
23	27.94	29.21
24	29.21	30.48
25	30.48	31.75
26	31.75	33.02
27	33.02	34.29
28	34.29	35.56
29	35.56	36.83
30	36.83	38.10
31	38.10	39.37
32	39.37	40.64
33	40.64	41.91
34	41.91	43.18
35	43.18	44.45
36	44.45	45.72
37	45.72	46.99
38	46.99	48.26
39	48.26	49.53
40	49.53	50.80
41	50.80	52.07
42	52.07	53.34
43	53.34	54.61
44	54.61	55.88
45	55.88	57.15
46	57.15	58.42
47	58.42	59.69
48	59.69	60.96
49	60.96	62.23
50	62.23	63.50

SPECIFICATIONS

- 1. Current Rate :0.75AMP
- 2. Operation Temperature :-40° C to +105° C
- 3. Contact Resistance :20m ΩMax.
- 4. Insulation Resistance :1000M Ω Min.
- 5. Withstanding Voltage :AC 500v
- 6. Insulator Material :Polyester (UL94V-0)
Standard: Nylon-PA6T
- 7. Contact Material :Brass
- 8. Contact plating :Au or Sn over Ni

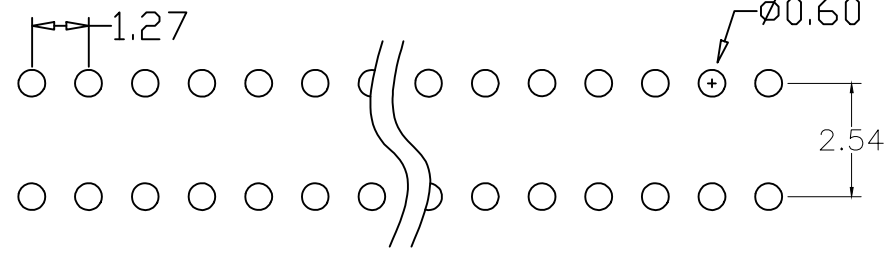

Recommended P.C.B Hloe Layout

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD.

APPROVED: WEI JIE
 CHECKED: HONG JIN YUN
 DRAWING: CHEN YA






深圳市裕诚电子有限公司
 SHENZHEN YUCHENG ELECTRONICS CO., LTD

GENERAL TOLERANCES		TITLE:	1.27 双排直母 H=4.6 PC=2.4	
X' ± 5.0'	X ± 0.30	PART NO:	127S2446-PIN数	
.X' ± 3.0'	.X ± 0.25	WEBSITE:	www.ycelectron.com	
.XX' ± 2.0'	.XX ± 0.15	REV: A	UNIT: mm	SCALE: /
.XXX' ± 1.0'	.XXX ± 0.10		SHEET: A4	⊕
SHEET: 1 / 1				

RoHS Compliant


REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
----------	-----------------	------------	------

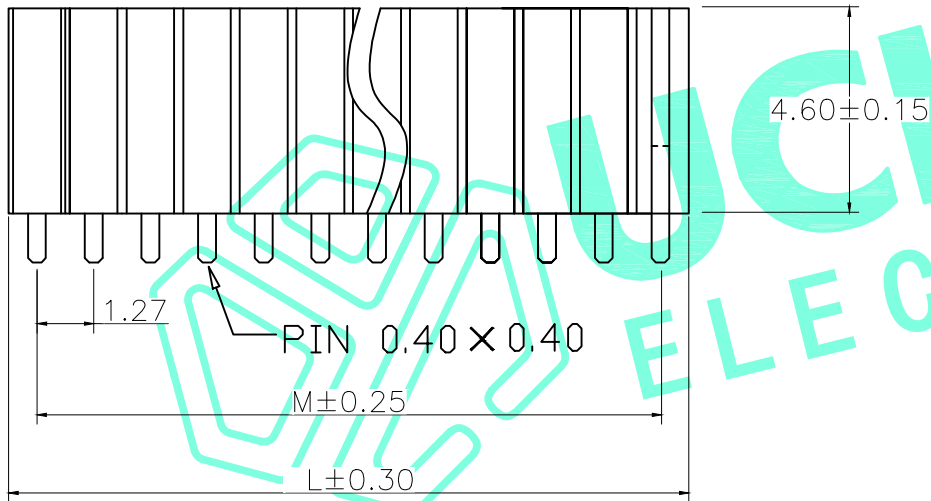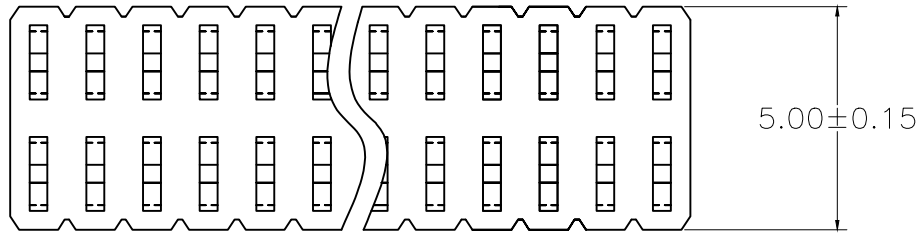

No. of PIN/ROW	Dimension Information	
	M	L
02	1.27	2.54
03	2.54	3.81
04	3.81	5.08
05	5.08	6.35
06	6.35	7.62
07	7.62	8.89
08	8.89	10.16
09	10.16	11.43
10	11.43	12.70
11	12.70	13.97
12	13.97	15.24
13	15.24	16.51
14	16.51	17.78
15	17.78	19.05
16	19.05	20.32
17	20.32	21.59
18	21.59	22.86
19	22.86	24.13
20	24.13	25.40
21	25.40	26.67
22	26.67	27.94
23	27.94	29.21
24	29.21	30.48
25	30.48	31.75
26	31.75	33.02
27	33.02	34.29
28	34.29	35.56
29	35.56	36.83
30	36.83	38.10
31	38.10	39.37
32	39.37	40.64
33	40.64	41.91
34	41.91	43.18
35	43.18	44.45
36	44.45	45.72
37	45.72	46.99
38	46.99	48.26
39	48.26	49.53
40	49.53	50.80
41	50.80	52.07
42	52.07	53.34
43	53.34	54.61
44	54.61	55.88
45	55.88	57.15
46	57.15	58.42
47	58.42	59.69
48	59.69	60.96
49	60.96	62.23
50	62.23	63.50

SPECIFICATIONS

- 1. Current Rate : 0.75AMP
- 2. Operation Temperature : -40° C to +105° C
- 3. Contact Resistance : 20m Ω Max.
- 4. Insulation Resistance : 1000M Ω Min.
- 5. Withstanding Voltage : AC 500v
- 6. Insulator Material : Polyester (UL94V-0)
Standard: Nylon-PA6T
- 7. Contact Material : Brass
- 8. Contact plating : Au or Sn over Ni

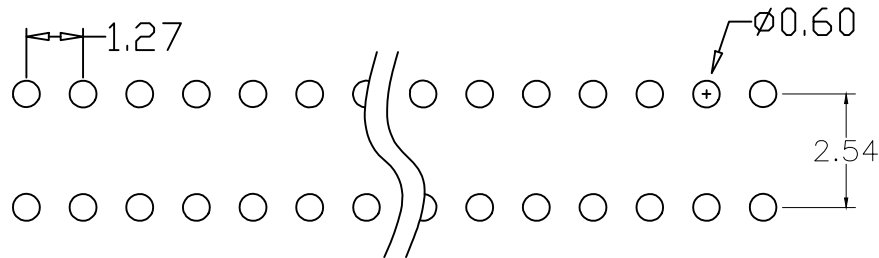

Recommended P.C.B Hlow Layout

<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD.</p>		<p>YUCHENG ELECTRONICS 深圳市裕诚电子有限公司 SHENZHEN YUCHENG ELECTRONICS CO., LTD</p>									
<p>APPROVED: WEI JIE</p>		<p>GENERAL TOLERANCES</p> <table border="1"> <tr> <td>X' ± 5.0'</td> <td>X. ± 0.30</td> </tr> <tr> <td>.X' ± 3.0'</td> <td>.X ± 0.25</td> </tr> <tr> <td>.XX' ± 2.0'</td> <td>.XX ± 0.15</td> </tr> <tr> <td>.XXX' ± 1.0'</td> <td>.XXX ± 0.10</td> </tr> </table>		X' ± 5.0'	X. ± 0.30	.X' ± 3.0'	.X ± 0.25	.XX' ± 2.0'	.XX ± 0.15	.XXX' ± 1.0'	.XXX ± 0.10
X' ± 5.0'	X. ± 0.30										
.X' ± 3.0'	.X ± 0.25										
.XX' ± 2.0'	.XX ± 0.15										
.XXX' ± 1.0'	.XXX ± 0.10										
<p>CHECKED: HONG JIN YUN</p>		<p>TITLE: 1.27 双排直母 H=4.6 PC=1.3</p>									
<p>DRAWING: CHEN YA</p>		<p>PART NO: 127S1346-PIN数</p>									
<p>SHEET: 1 / 1</p>		<p>WEBSITE: www.ycelectron.com</p>									
<p>REV: A</p>		<p>UNIT: mm SCALE: / SHEET: A4</p>									