


RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
----------	-----------------	------------	------

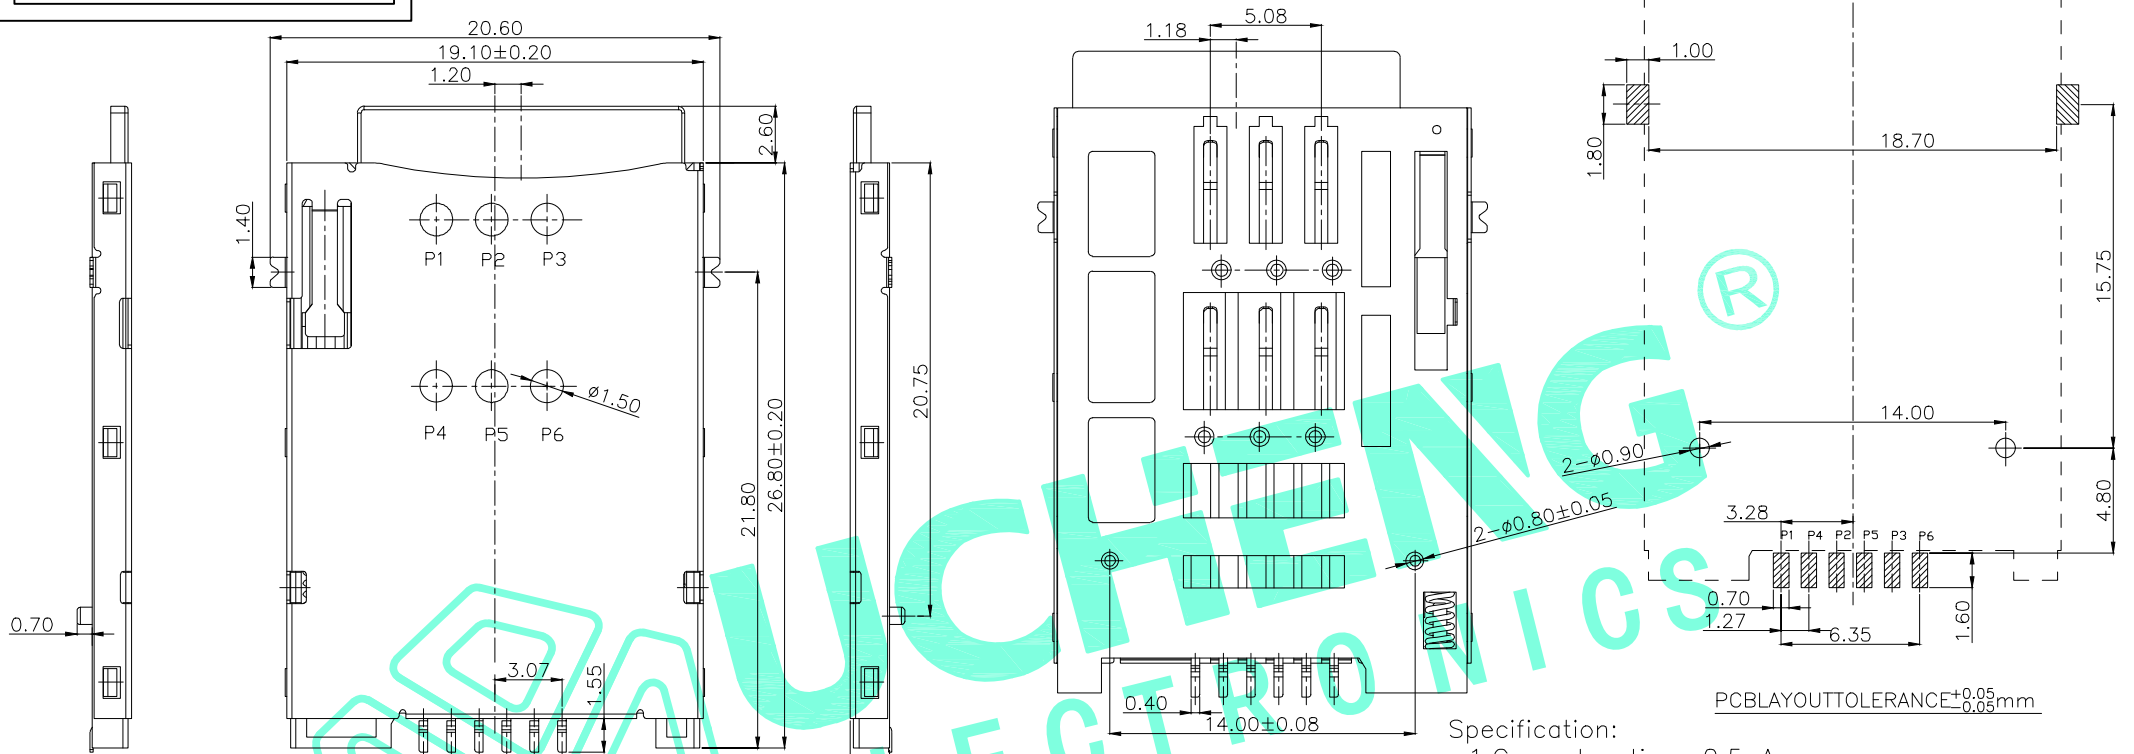

- Specification:
1. Current rating: 0.5 A
  2. Voltage rating: DC 5V
  3. Dielectric strength: 500V AC RMS for 1 minute.
  4. Contact resistance: 100mΩ max.
  5. Insulator resistance: 500MΩ min. at 250V DC.
  6. Mating unmating cycles: 2000 cycles

⑥	Sliding Block	1	LCP	Black
⑤	Clasp	1	SUS	Ni Plated
④	Spring	1	SUS	Ni Plated
③	Shell	1	SUS	Ni Plated
②	Terminal	6	Phosphor Bronze	Sn Plated
①	Housing	1	LCP	Black
ITEM	PART NAME	QTY.	MATERIAL	FINISHING

PINNO.	CONNECTOR TERMINAL
P1	VCC: PWR SIGNAL AND GND
P2	RST: RESET SIGNAL
P3	CLK: CLOCK SIGNAL
P4	GND: RWRSIGNAL AND GND
P5	VPP: PROGRAMMING VOLTAGE
P6	IO: SERIAL DATA INPUT OUTPUT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD.

APPROVED: WEI JIE  
 CHECKED: HONG JIN YUN  
 DRAWING: CHEN YA

**UCHENG** ELECTRONICS 深圳市裕诚电子有限公司  
 SHENZHEN YUCHENG ELECTRONICS CO., LTD

GENERAL TOLERANCES	TITLE:	SIM卡座 6P 自弹式 PUSH		
30~以上 ±0.30	PART NO.:	SIM-268Y		
10~30 ±0.25	WEBSITE:	www.ycelectron.com		
5~10 ±0.20	REV: A	UNIT: mm	SCALE: /	SHEET: A4
~ 5 ±0.15	SHEET: 1 / 1			