

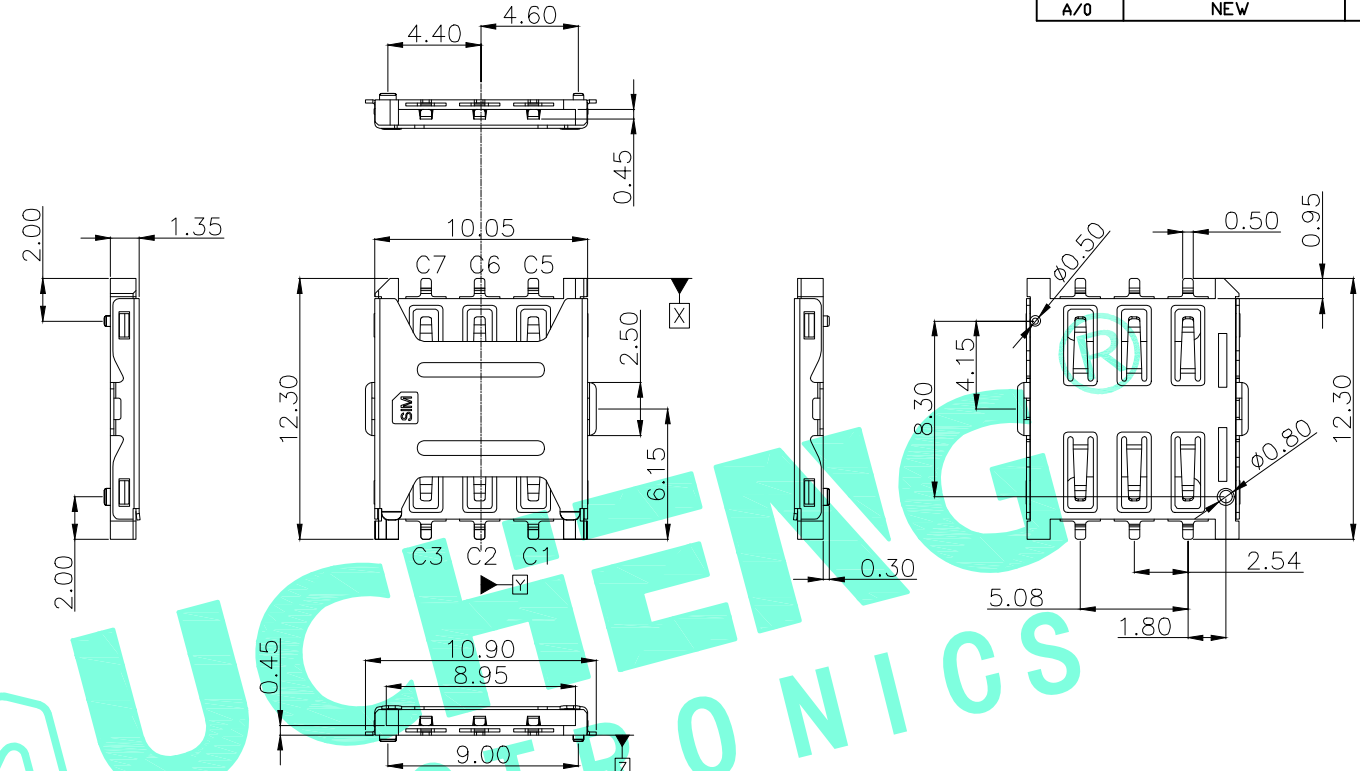


RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
----------	-----------------	------------	------

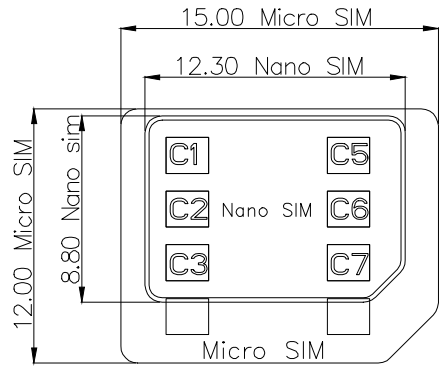

- PAD AREA
- KEEP OUT AREA
- NO COPPER AREA (NO Trace&Via&GND)
- GND PATTERN ONLY

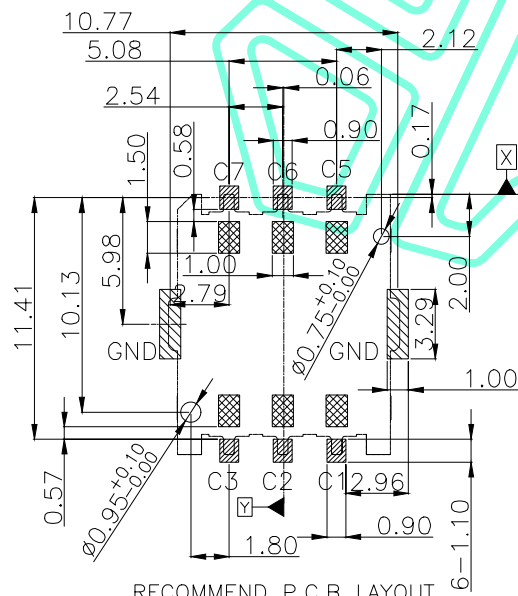

RECOMMEND P.C.B LAYOUT
(General tolerance ±0.05)

Specification

- 1.MATERIAL:
 - 1.1 Insulator: High Temperature Thermoplastic, (LCP,S475),UL Black 94V-0.
 - 1.2 Contact: C5210R-H,T=0.15±0.03mm
 - 1.3 SHELL: SUS304R-H,T=0.15±0.03mm
- 2.PLATING:
 - 2.1 Contact: Plated 50u" Ni Over Contact Au 1u,Pad Au 1u
 - 2.2 Shell: Plated 50u" Ni Overall,Pad Au 1u
- 3.Electrical:
 - 3.1 Current Rating :0.5A
 - 3.2 Voltage Rating :5V AC/DC
 - 3.3 Ambient Temperature Range :-25°C~+85°C
 - 3.4 Ambient Humidity Range :95% R.H. Max.
 - 3.5 Contact Resistance:100mΩ max.
 - 3.6 Insulation Resistance:1000MΩ min./500VDC
- 4.Mating Cycles:3,000 Insertions Min

SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS.LTD AND SHALL NOT BE REPRODUCED,COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS.LTD

APPROVED: WEI JIE
CHECKED: HONG JIN YUN
DRAWING: CHEN YA

UCHENG ELECTRONICS 深圳市裕诚电子有限公司
SHENZHEN YUCHENG ELECTRONICS CO.,LTD

GENERAL TOLERANCES	TITLE: Nano SIM-6P 1.35H带检测卡座
30~以上 ±0.30	PART NO: SIM-123Y
10~30 ±0.25	
5~10 ±0.20	WEBSITE: www.ycelectron.com
~ 5 ±0.15	
SHEET: 1 / 1	REV: A UNIT: mm SCALE: / SHEET: A4