

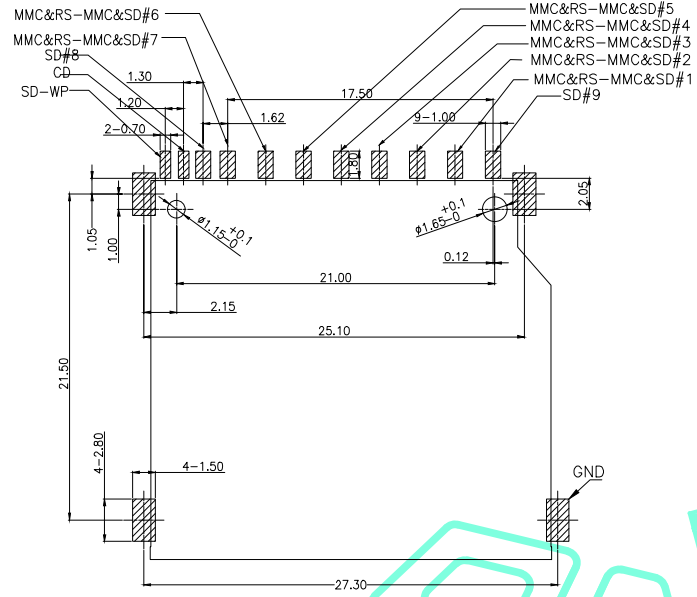


RoHS Compliant

REV.	DESCRIPTION	DESIGN	DATE
A/0	NEW	CWF	

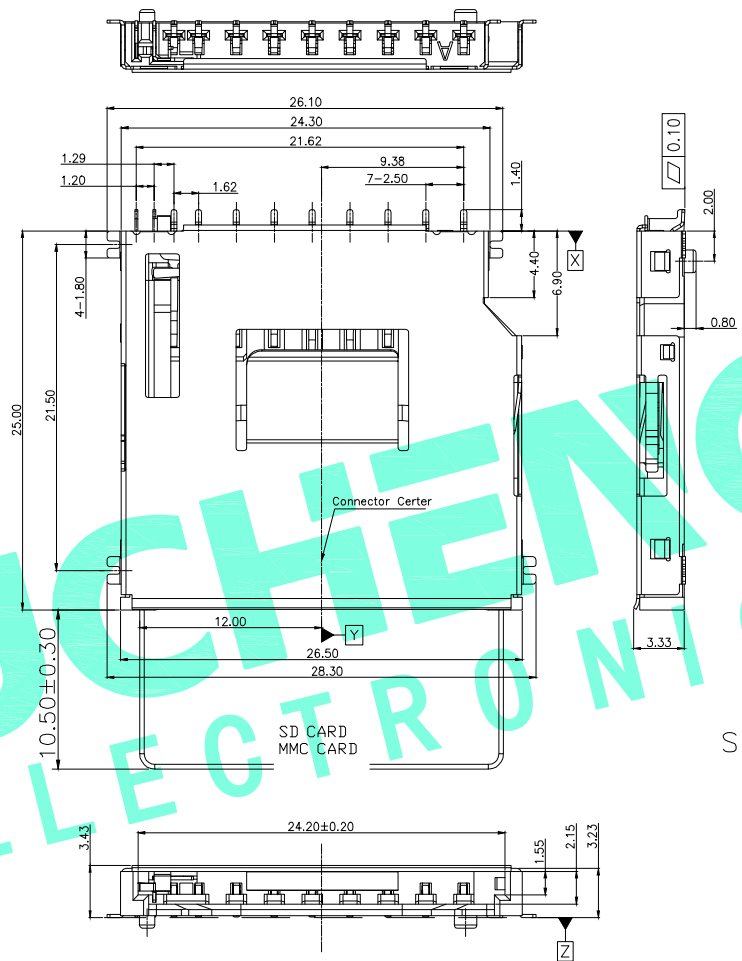


RECOMMENDED P.C.B LAYOUT
(General tolerance ± 0.05)

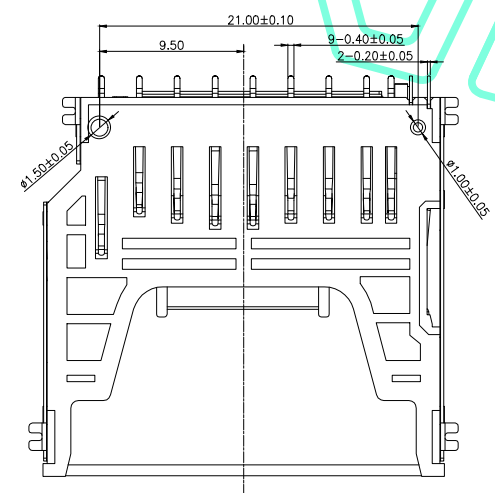

PIN NO.	MEMORY CARD PIN NO.
MMC&RS-MMC&SD#1	MMC&RS-MMC/SD-1 (CD/DAT3)
MMC&RS-MMC&SD#2	MMC&RS-MMC/SD-2 (CMD)
MMC&RS-MMC&SD#3	MMC&RS-MMC/SD-3 (VSS1)
MMC&RS-MMC&SD#4	MMC&RS-MMC/SD-4 (VDD)
MMC&RS-MMC&SD#5	MMC&RS-MMC/SD-5 (CLK)
MMC&RS-MMC&SD#6	MMC&RS-MMC/SD-6 (VSS2)
MMC&RS-MMC&SD#7	MMC&RS-MMC/SD-7 (DAT0)
SD#8	SD-8 (DAT1)
SD#9	SD-9 (DAT2)

Specification

- 1 Current Rating :0.5A.
- 2 Voltage Rating :DC 5V
- 3 Ambient Temperature Range : $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- 4 Ambient Humidity Range :95% R.H. Max.
- 5 Contact Resistance:100m Ω max.
- 6 Insulation Resistance:1000M Ω min./500VDC
- 7 Durability:10,000 cycles

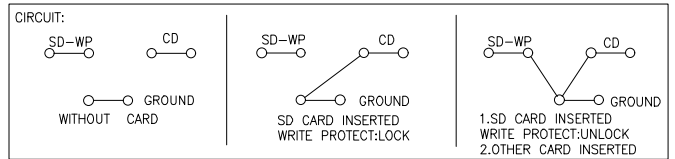

ITEM	PART NAME	QTY.	MATERIAL	FINISHING
③	Shell	1	SUS	Ni Plated
②	Terminal	11	Phosphor Bronze	Au/Ni Plated
①	Housing	1	LCP	Black

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS.,LTD

APPROVED: WEI JIE
CHECKED: HONG JIN YUN
DRAWING: CHEN YA

UCHENG 深圳市裕诚电子有限公司
ELECTRONICS SHENZHEN YUCHENG ELECTRONICS CO.,LTD

GENERAL TOLERANCES
30~以上 ± 0.30
10~30 ± 0.25
5~10 ± 0.20
~ 5 ± 0.15

TITLE: SD卡座 长卡 带压片 防震 车载专用
PART NO: SD-250Y
WEBSITE: www.ycelectron.com
REV: A UNIT: mm SCALE: / SHEET: A4