


RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
-------------	--------------------	---------------	------

- 1、极数 Number of poles: 2-16
- 2、工作温度 Working Temperature: -40°C~+85°C
- 3、额定电压 Voltage rating : 125V AC/DC
- 4、额定电流 Rated current : 1.0A
- 4、接触电阻 Contact resistance: $\leq 30\text{M}\Omega$
- 5、绝缘电阻 Insulation resistance: $\geq 100\text{M}\Omega$
- 6、耐压 Withstand voltage : 250V AC
- 7、端子 Terminal : 铜合金 Copper Alloy
外壳 Housing : PPA

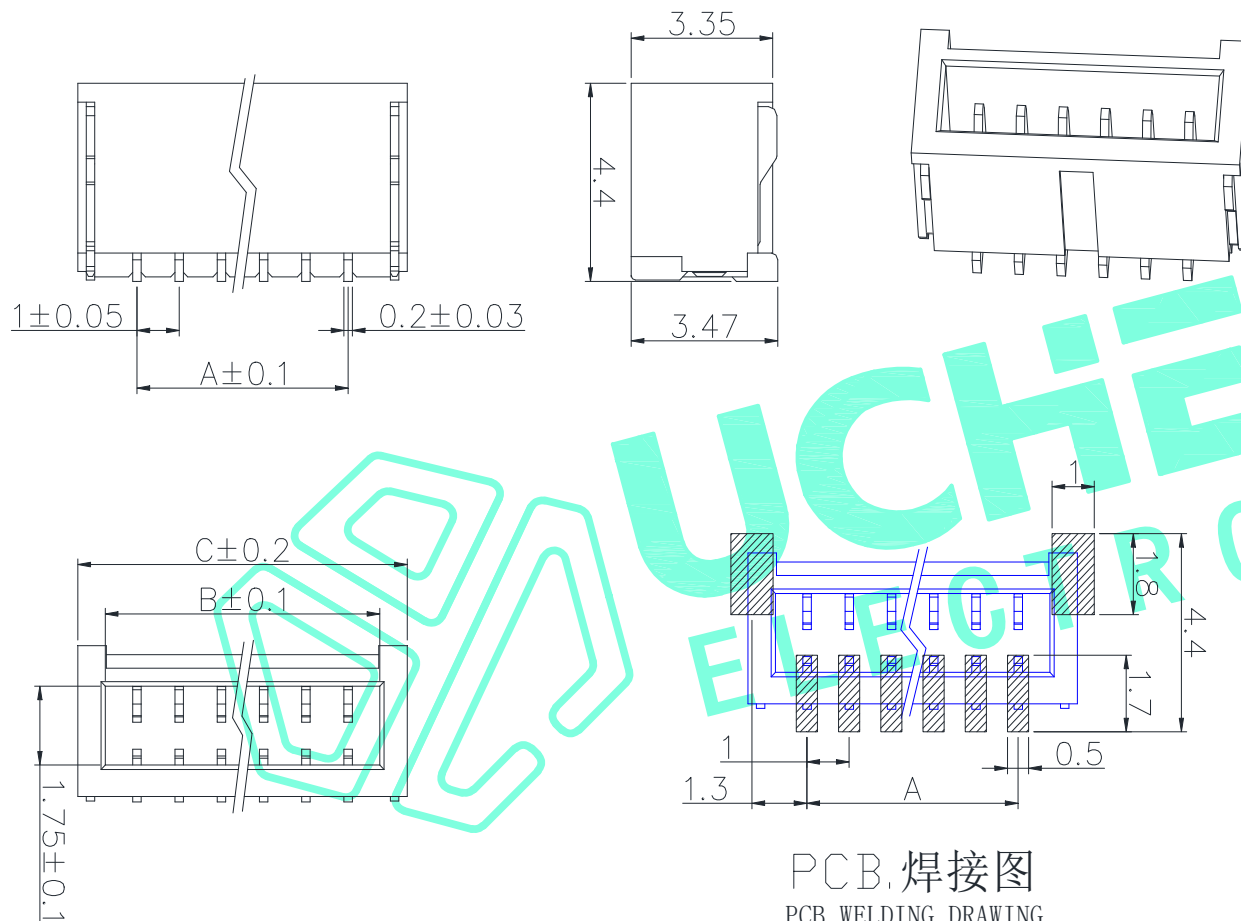

PCB. 焊接图
PCB. WELDING DRAWING

	A	B	C
2P	1.0	2.5	3.8
3P	2.0	3.5	4.8
4P	3.0	4.5	5.8
5P	4.0	5.5	6.8
6P	5.0	6.5	7.8
7P	6.0	7.5	9.8
8P	7.0	8.5	10.8
nP	•••	•••	•••

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD

YUCHENG ELECTRONICS 深圳市裕诚电子有限公司
SHENZHEN YUCHENG ELECTRONICS CO.,LTD

GENERAL TOLERANCES	TITLE:	SMD NH针座		
.X ±0.3 .X' ±0.1*	PART NO:	1.0立式贴片 -Part No		
.XX ±0.25 .XX' ±0.05*	WEBSITE:	www.ycelectron.com		
.XXX ±0.05 .XXX' ±0.005*	REV: A	UNIT: mm	SCALE: /	SHEET: A4
APPROVED: WEI JIE	SHEET: 1 / 1			
CHECKED: HONG JIN YUN				
DRAWING: CHEN YA				