


RoHS Compliant

# 产品规格书

## PRODUCT SPECIFICATION

- 针座 WAFER
- 壳体材料 Material: Nylon66 UL 94V-0
- 针 Brass/Tin-plated
- 卧式 Right Angle (Type)

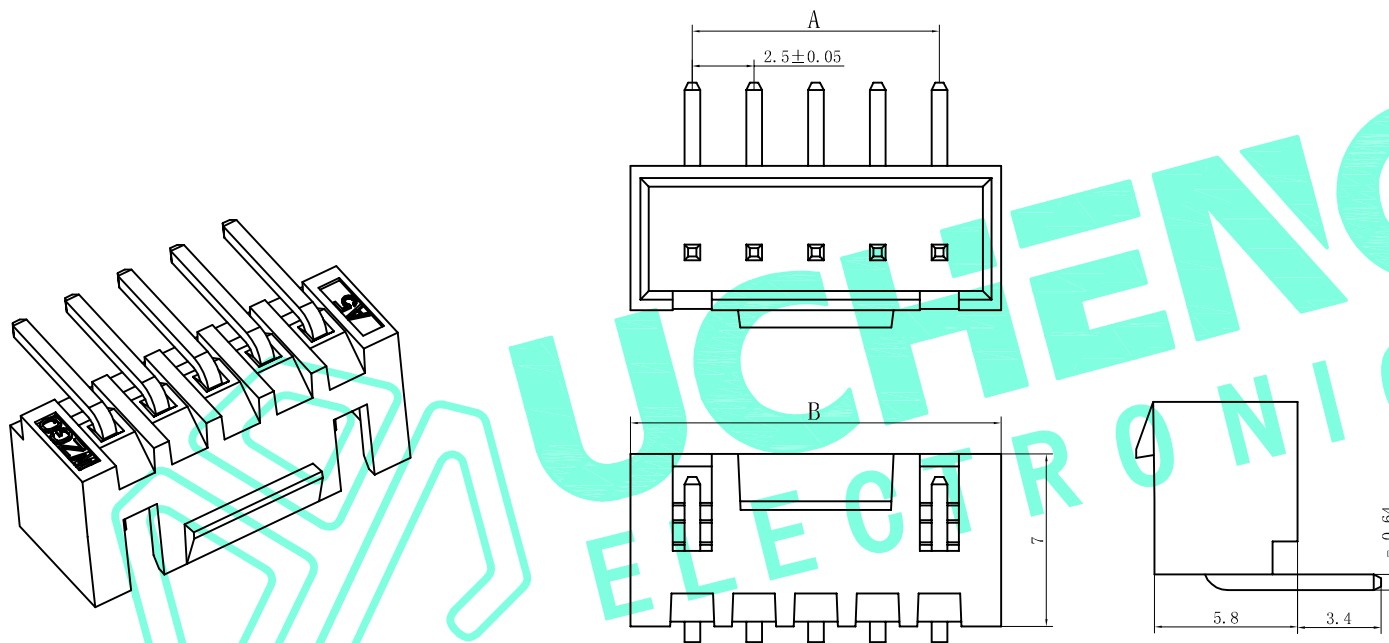

Poles	Part No	Dimensions mm	
		A	B
2	XHB-2AW	2.50	7.50
3	XHB-3AW	5.00	10.00
4	XHB-4AW	7.50	12.50
5	XHB-5AW	10.00	15.00
6	XHB-6AW	12.50	17.50
7	XHB-7AW	15.00	20.00
8	XHB-8AW	17.50	22.50
9	XHB-9AW	20.00	25.00
10	XHB-10AW	22.50	27.50
11	XHB-11AW	25.00	30.00
12	XHB-12AW	27.50	32.50
13	XHB-13AW	30.00	35.00
14	XHB-14AW	32.50	37.50
15	XHB-15AW	35.00	40.00
16	XHB-16AW	37.50	42.50
--	--	--	--

- 1. 极数 poles: 2 to 20P
- 2. 额定电流 Current rating: 3.0A AC, DC
- 3. 额定电压 Voltage rating: 250V AC, DC
- 4. 温度范围 Temperature range: -25. C to +85. C
- 5. 接触电阻 Contact resistance:  $\leq 10\text{m}\Omega$
- 6. 绝缘电阻 Insulation resistance:  $\geq 1000\text{m}\Omega$
- 7. 耐电压 Withstand voltage: 1000V AC/minute
- 8. 适用线规 Applicable Wire: AWG #30 to #22
- 9. 适用基板厚度 Applicable PC board thickness: 1.6mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS.,LTD



深圳市裕诚电子有限公司  
SHENZHEN YUCHENG ELECTRONICS CO.,LTD

APPROVED: WEI JIE  
CHECKED: HONG JIN YUN  
DRAWING: CHEN YA

GENERAL TOLERANCES	
>0-3	±0.15
>3-18	±0.2
>18-50	±0.35
>50-120	±0.5
SHEET:	1 / 1

TITLE:	XHB-AW型连接器		
PART NO:	2.5卧式插件-Part No		
WEBSITE:	www.ycelectron.com		
REV: A	UNIT: mm	SCALE: /	SHEET: A4

