

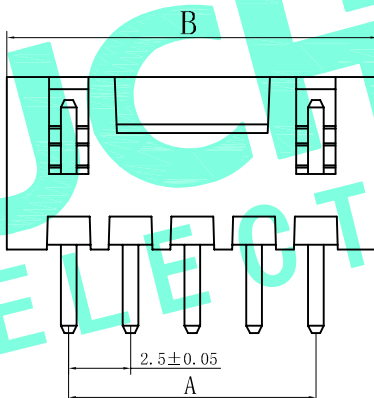
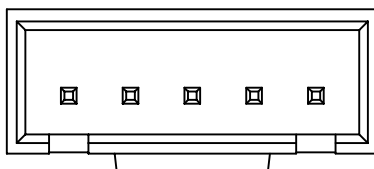


RoHS Compliant

产品规格书

PRODUCT SPECIFICATION

- 针座 WAFER
- 壳体材料 Material:Nylon66 UL 94V-0
- 针 Brass/Tin-plated
- 立式 Straight Angle (Type)

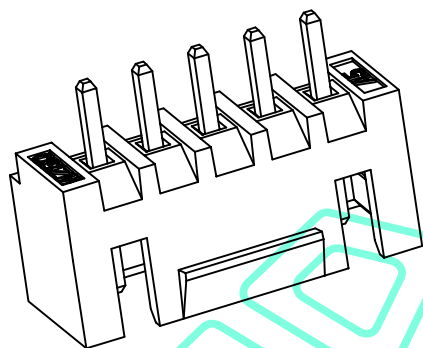

- 1. 极数 poles: 2 to 20P
- 2. 额定电流 Current rating: 3.0A AC, DC
- 3. 额定电压 Voltage rating: 250V AC, DC
- 4. 温度范围 Temperature range: -25. C to +85. C
- 5. 接触电阻 Contact resistance: $\leq 10m\Omega$
- 6. 绝缘电阻 Insulation resistance: $\geq 1000m\Omega$
- 7. 耐电压 Withstand voltage: 1000V AC/minute
- 8. 适用线规 Applicable Wire: AWG #30 to #22
- 9. 适用基板厚度 Applicable PC board thickness: 1.6mm

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
----------	-----------------	------------	------

Poles	Part No	Dimensions mm	
		A	B
2	XHB-2A	2.50	7.50
3	XHB-3A	5.00	10.00
4	XHB-4A	7.50	12.50
5	XHB-5A	10.00	15.00
6	XHB-6A	12.50	17.50
7	XHB-7A	15.00	20.00
8	XHB-8A	17.50	22.50
9	XHB-9A	20.00	25.00
10	XHB-10A	22.50	27.50
11	XHB-11A	25.00	30.00
12	XHB-12A	27.50	32.50
13	XHB-13A	30.00	35.00
14	XHB-14A	32.50	37.50
15	XHB-15A	35.00	40.00
16	XHB-16A	37.50	42.50
---	---	---	---

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS.,LTD.AND SHALL NOT BE REPRODUCED,COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS.,LTD

APPROVED: WEI JIE
 CHECKED: HONG JIN YUN
 DRAWING: CHEN YA

UCHENG ELECTRONICS 深圳市裕诚电子有限公司
 SHENZHEN YUCHENG ELECTRONICS CO.,LTD

GENERAL TOLERANCES	TITLE:	XHB-A型连接器		
>0-3 ±0.15	PART NO:	2.5立式插件-Part No		
>3-18 ±0.2	WEBSITE:	www.ycelectron.com		
>18-50 ±0.35	REV: A	UNIT: mm	SCALE: /	SHEET: A4
>50-120 ±0.5	SHEET: 1 / 1			