
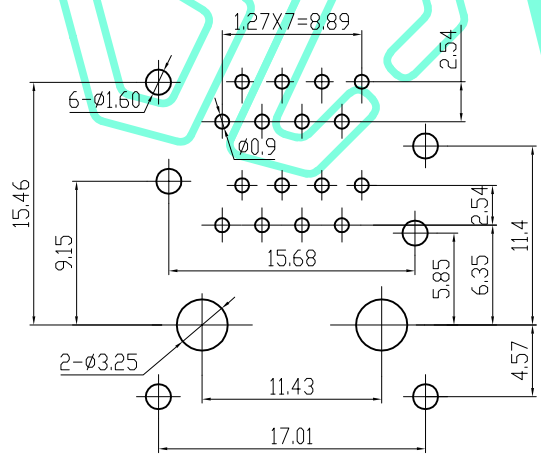
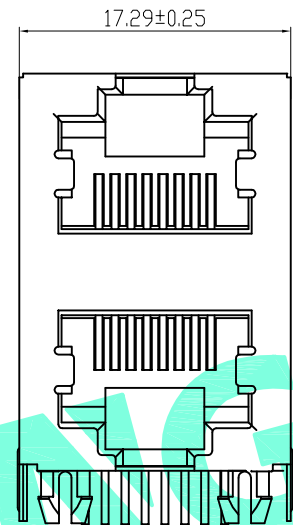
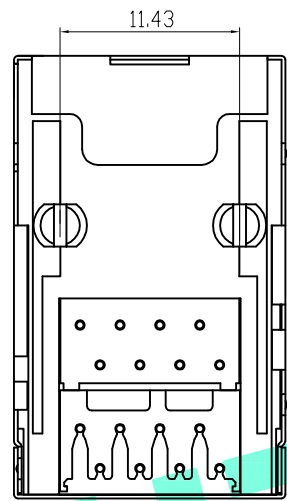


RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
-------------	--------------------	---------------	------

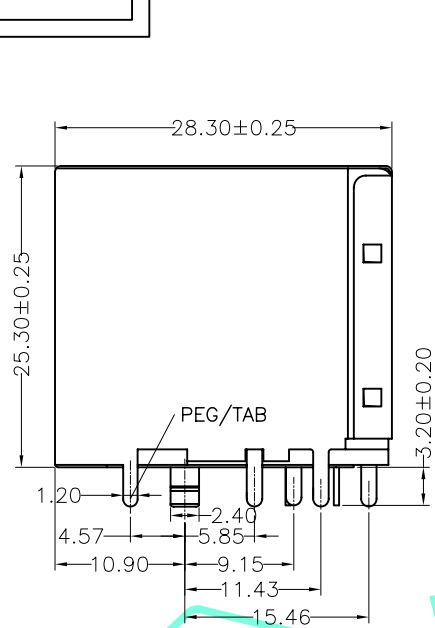

PC Board Layout

主要参数:

1. 额定电压、电流: 125V/1.5A max
2. 接触电阻: 40mΩ Max
3. 绝缘电阻: 500MΩ Min
4. 试验条件: AC1000V/0.5mA for 1 minute
5. 焊接温度: 260±5°C 3±0.5s
6. 吸塑盒包装25PCS/盘

材质要求

1. 基座: UL94V 黑色
2. 屏蔽: 铜 镀镍 40u"
3. 信号针: 磷铜镀 锡金 1u"

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD

APPROVED: WEI JIE
 CHECKED: HONG JIN YUN
 DRAWING: CHEN YA

UCHENG ELECTRONICS 深圳市裕诚电子有限公司
 SHENZHEN YUCHENG ELECTRONICS CO.,LTD

GENERAL TOLERANCES		TITLE:	RJ45-59B 21S双层8P8C 21无弹	
.XXX ±0.10	.X' ±3'	PART NO:	RJ45-5921S8P8C	
.XX ±0.20	.XX' ±2'	WEBSITE:	www.ycelectron.com	
.X ±0.30		REV: A	UNIT: mm	SCALE: /
SHEET: 1 / 1			SHEET: A4	

