
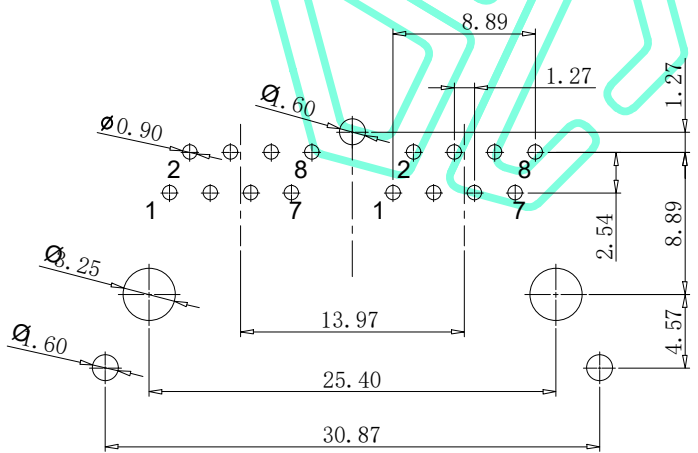
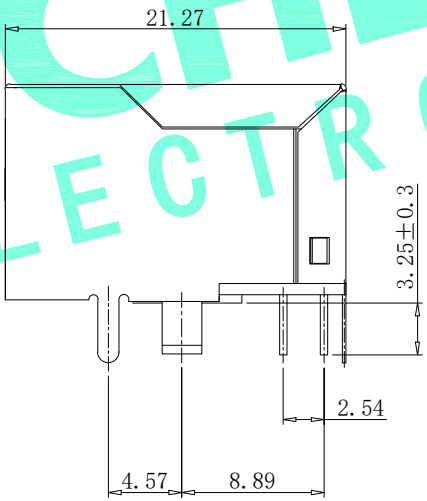
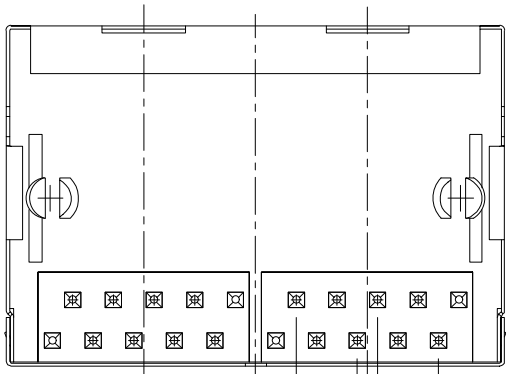


RoHS Compliant

| | | | |
|----------|-----------------|------------|------|
| REV. A/0 | DESCRIPTION NEW | DESIGN CWF | DATE |
|----------|-----------------|------------|------|

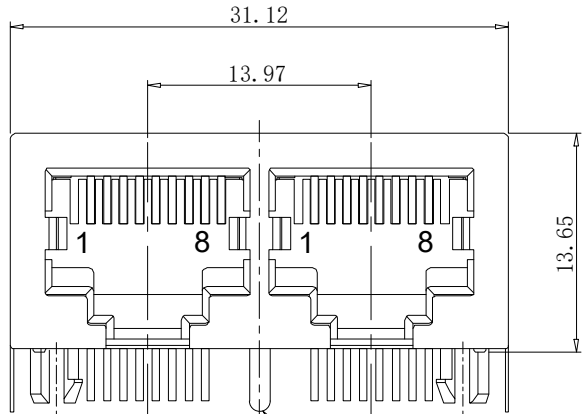

PC Board Layout
Component Side Shown

机构特性:

1. 塑壳材质: PBT, UL94V-0
2. 圆针材质: 磷青铜, 直径0.46MM, 镍底, 表面全镀金
3. 屏蔽壳材质: 黄铜, 厚度0.2MM 镀镍
4. 插入力/拔出力: 30N Max.
5. 配合强度: 50N for 60s±5s
6. 使用寿命: 最少750次插拔

电气特性:

1. 额定电压: 150 VAC RMS
2. 额定电流: 1.5 AMPS@25. C
3. 接触电阻: 20 mΩ Max
4. 绝缘电阻: 1000 MΩ Min.@500VDC
5. 耐压强度: CONTACT TO CONTACT: 1000V DC OR AC PEAK;
CONTACT TO SCREEN AND TEST PANEL
: 1500V DC OR AC PEAK@0.5mA 50Hz or 60Hz 1分钟

环境特性:

1. 储存温度: -40. C - +85. C 相对湿度<80 %
2. 工作温度: -40. C - +85. C

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD



深圳市裕诚电子有限公司
SHENZHEN YUCHENG ELECTRONICS CO., LTD

| | |
|-----------|--------------|
| APPROVED: | WEI JIE |
| CHECKED: | HONG JIN YUN |
| DRAWING: | CHEN YA |

| | | | | | |
|--------------------|----------|----------|---------------------|----------|-----------|
| GENERAL TOLERANCES | | TITLE: | 59A-1X2屏蔽无弹脚前4.57反向 | | |
| .XXX ±0.10 | .X' ±3' | PART NO: | RJ45-8822F3111 | | |
| .XX ±0.20 | .XX' ±2' | WEBSITE: | www.ycelectron.com | | |
| .X ±0.30 | | REV: A | UNIT: mm | SCALE: / | SHEET: A4 |
| SHEET: 1 / 1 | | | | | |

