


RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
-------------	--------------------	---------------	------

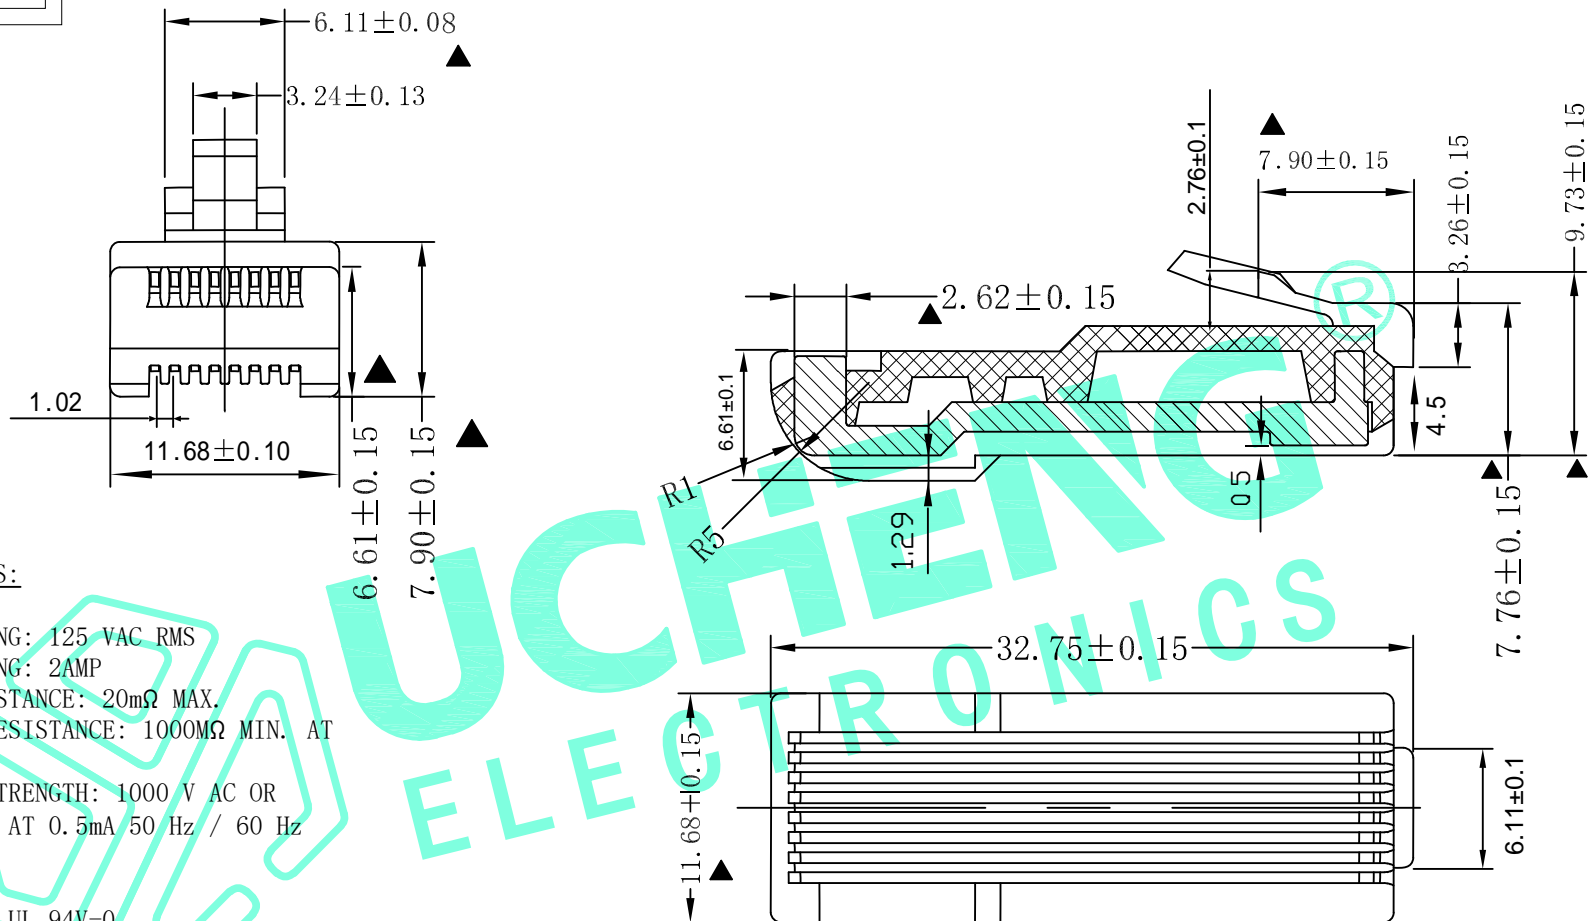

**SPECIFICATION NOTES:**

**ELECTRICAL:**

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 2AMP
- CONTACT RESISTANCE: 20mΩ MAX.
- INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
- DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE

**MECHANICAL:**

- HOUSING :PC UL 94V-0
- CONTACT MATERIAL:BRASS
- PLATING:GOLD PLATING OVER NICKEL 1U"
- OPERATING LIFE:1000 CYCLES MIN.
- RETENTION STRENGTH:50N MIN. FOR 60S±5S
- SALT SPRAY:24HOUR

**ENVIRONMENTAL:**

- STORAGE:-40° C TO +85° C RELATIVE HUMIDITY<80%
- GUARANTEE PERIOD:12 MONTHS
- OPERATION: -40°C~+85°C

**PACKING:**

- 100PCS/BOX
- 1000PCS/CARTON

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS ,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS.,LTD		<b>深圳市裕诚电子有限公司</b> SHENZHEN YUCHENG ELECTRONICS CO.,LTD	
GENERAL TOLERANCES X. ±0.50 X.* ± 2° .X ±0.30 .X.* ± 1° .XX ±0.10 .XX.* ± 0.5° XXX ±0.05		TITLE: <b>8P8C水晶转接头XL-704 L32.75圆角</b>	PART NO: <b>RJ45-8P8CL3275</b>
APPROVED: <b>WEI JIE</b>	CHECKED: <b>HONH JIN YUN</b>	WEBSITE: <b>www.ycelectron.com</b>	REV: A
DRAWING: <b>CHEN YA</b>	SHEET: 1 / 1	UNIT: mm	SCALE: / SHEET: A4