

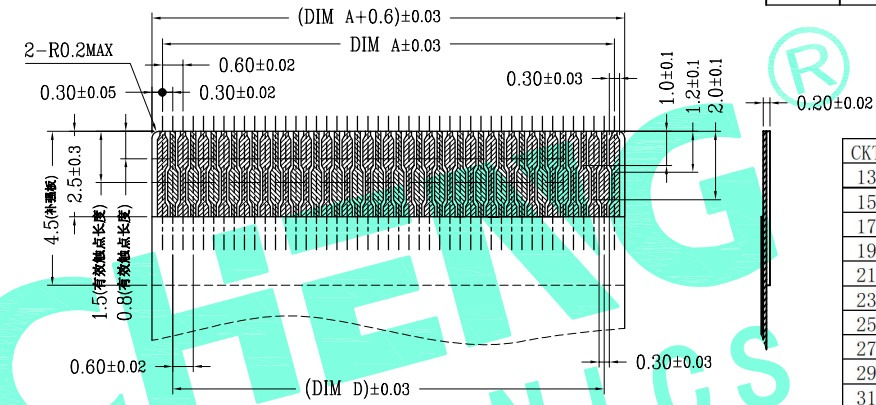
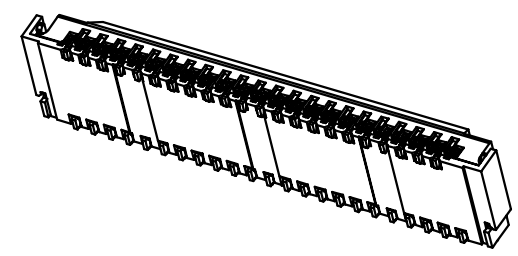
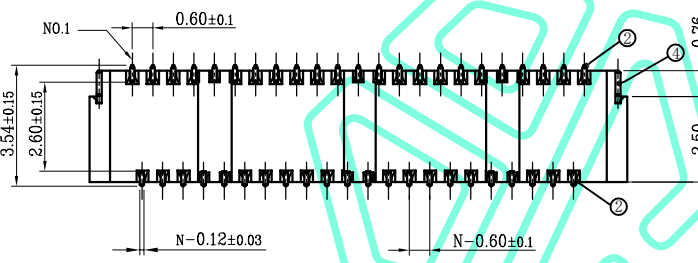
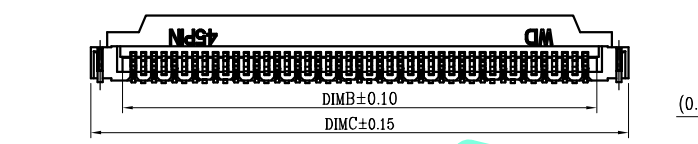



RoHS Compliant

REV. A/0	DESCRIPTION NEW	DESIGN CWF	DATE
①	0.3后压胶芯 (H1.0)	LCP UL94V-0 本色	
②	0.3后压端子 (H1.0)	铜合金/表面镀金	
③	0.3后压后盖 (H1.0)	LCP UL94V-0 黑色	
④	0.3后压焊片 (H1.0)	铜合金/表面镀锡	

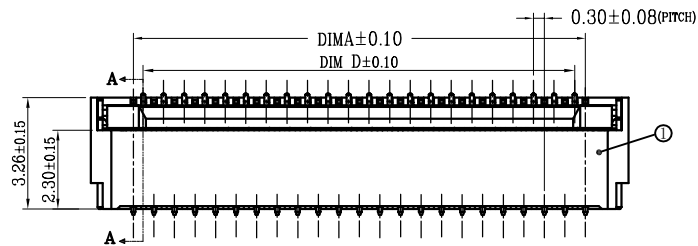

适用扁平线 (Applicable Flat Cable)

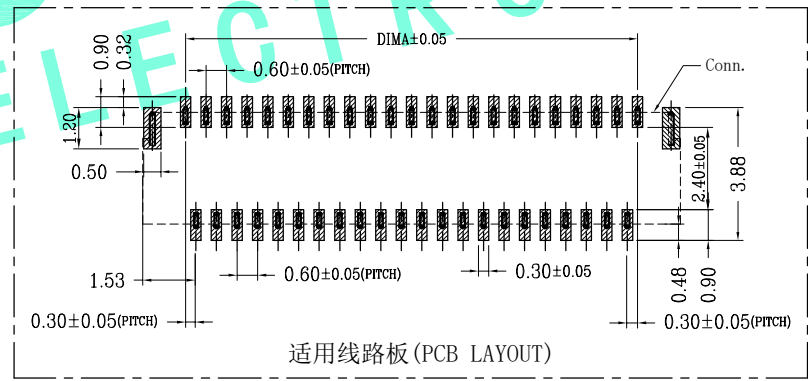

适用线路板 (PCB LAYOUT)

CKT	DIMA	DIMB	DIMC	DIMD
13	3.60	4.25	6.10	3.00
15	4.20	4.85	6.70	3.60
17	4.80	5.45	7.30	4.20
19	5.40	6.05	7.90	4.80
21	6.00	6.65	8.50	5.40
23	6.60	7.25	9.10	6.00
25	7.20	7.85	9.70	6.60
27	7.80	8.45	10.30	7.20
29	8.40	9.05	10.90	7.80
31	9.00	9.65	11.50	8.40
33	9.60	10.25	12.10	9.00
35	10.20	10.85	12.70	9.60
37	10.80	11.45	13.30	10.20
39	11.40	12.05	13.90	10.80
41	12.00	12.65	14.50	11.40
43	12.60	13.25	15.10	12.00
45	13.20	13.85	15.70	12.60
47	13.80	14.45	16.30	13.20
49	14.40	15.05	16.90	13.80
51	15.00	15.65	17.50	14.40
53	15.60	16.25	18.10	15.00
55	16.20	16.85	18.70	15.60
57	16.80	17.45	19.30	16.20
59	17.40	18.05	19.90	16.80
61	18.00	18.65	20.50	17.40
63	18.60	19.25	21.10	18.00
65	19.20	19.85	21.70	18.60
67	19.80	20.45	22.30	19.20
69	20.40	21.05	22.90	19.80
71	21.00	21.65	23.50	20.40

- 技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
 2. 温度范围: -55° C~85° C.
 3. 接触电阻: ≤40mΩ (DC20mV最大电压/10mA最大电流).
 4. 额定电压: 30V AC.
 5. 额定电流: 0.2A DC.
 6. 绝缘电阻: ≥50MΩ (DC500V).
 7. 产品料号:

HW03100-**-**

NO OF CKT (产品PIN数) 00 后盖有LOGO;WD
OW 后盖无LOGO

Plating (电镀方式) Packing (包装方式)

1: 端子全金 (G/F OVERALL) T: TUBE管装
6: 端子点镀金 R: TAPE & REEL卷装

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN YUCHENG ELECTRONICS, LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN YUCHENG ELECTRONICS, LTD

APPROVED: WEI JIE
CHECKED: HONG JIN YUN
DRAWING: CHEN YA

YUCHENG ELECTRONICS 深圳市裕诚电子有限公司
SHENZHEN YUCHENG ELECTRONICS CO.,LTD

GENERAL TOLERANCES	TITLE:	0.3 Pitch后压卧式(H=1.0)
30~以上 ±0.30	PART NO:	HW03100-****-**
10~30 ±0.20	WEBSITE:	www.ycelectron.com
5~10 ±0.15	REV: A	UNIT: mm SCALE: / SHEET: A4
~ 5 ±0.10	SHEET: 1 / 1	